Bi-directional Data Transmitter/Receiver

Overview

The data series fiber transmission products support optical transmission of bi-directional data up to 4 channels through one fiber either in multi-mode or single-mode. Adjustment and maintenance free, these modules are designed to support data interface.

A cost-effective single unit design, this product is well-suited for in field configuration and also accommodates installation and system growth while delivering long operating distances of up to 60 Km. Featuring robust construction well suited for harsh environments the unit is available in both rack mount and wall mount configuration. Plug-and-Play design ensures ease of installation requiring no electrical or optical adjustments.

Standard Features

Data

- Supports one or four bi-directional data
- Supports multi-protocol data in RS232, RS422 & RS485 2 or 4-Wire Tri-state formats
- External access for data format selection via DIP switches

•

LEDs

• Duplicated LED indicators on the front and rear of the unit for the convenience of observation

Network management system for rack communications

- Web browser support
- Systems data performance monitoring
- System devices and components Transmitters, Receivers, Modules, etc. status monitoring and operational management
- LAN, Ethernet networking capabilities
- IP addressable
- Alarm activation, execution, message responding and reporting
- Operational level determination and access control
- Network ready for health and connection monitoring

Others

- Adjustment and maintenance free
- Unique modular design for in field configuration to match installation and system growth
- Long distances operation up to 60Km
- No setup just plug-and-play
- Excellent suppression of EMI & RFI and elimination of ground loop
- Transient voltage protection on power supply and all signal inputs & outputs
- · Robust design for harsh environment applications

Single- or Four-Channel

Bi-directional Data Transmitter/ Receiver






Specifications

Data				
Data Direction	Bi-directional Duplex			
Data Interface	RS232, RS422, RS485 2 or 4	RS232. RS422. RS485 2 or 4-wire Tri-state		
Selection Method	DIP switch-selectable			
Data Rate	0~115,200bps			
Data Protocol	Protocol transparency			
Line Carrier Detection	RS485 (2/4-wire) Tri-state o	utput		
Data Tx & Rx Status	Green/Red LED lit			
Input/ Output Connectors	7-pin screw terminals			
Optical				
Wavelength	1310 and 1550			
Number of Fiber	1			
Tx Output Power:	<u>+</u>			
Single Mode (40Km)	1310nm & 1550nm	-9dBm ± 3 dBm		
Multi-Mode (4Km)	1310nm & 1550nm	-7dBm + 2 dBm		
Optical Buget:	13101111 & 13301111	7dbiii ± 2 dbiii		
Multi-mode (62.5µm/125µm)	12dB			
· · · · · · · · · · · · · · · · · · ·	18dB (wavelength in 1310nr	m)		
Single-mode (9µm/125µm)	14dB (wavelength in 1550nr			
Single-mode (9µm/125µm)	25dB (wavelength in 1310nm)			
Long Haul	19dB (wavelength in 1550nm)			
Transmission Distance:				
Multi-Mode (Limited by Fiber Bandwidth)	4Km (DFVMMD101-T/R & DF	FVMMD102-T/R)		
Single-Mode (Limited by Fiber Bandwidth)	40Km			
Fiber Connector (Standard Supply)	ST			
Mechanical				
Dimensions or module HxWxD in mm	a)25.4 × 158.4 × 231.8 1-Slo			
Differsions of Module HAVVAD III IIII	b) 50.8 × 158.4 × 231.8 2-SI	ot		
Shipping weight	a) 0.74kg 1-slot			
	b) 1.07kg 2-slot			
Environmental				
Operating Temp	-40 C to +75 C			
Storage Temp	-40 C to +85 C			
Relative Humidity	0 to 95% non-condensing			
Power Requirement				
	12VDC	and a standard and and a standard that 2000		
Supply Voltage	Standalone: Derived from an external adaptor via the 2-pin connector at rear of the module.			
Supply voltage	Rack chassis: derived from the chassis PSU via the 30-pin			
	connector at rear of the module.			
Cord protection	Poly Fuse (1A)			
Current Consumption	Max. 500mA			

Application Diagram

Cable connection of DFDSM004-TX/RX, DFDSML004-TX/RX and DFDMM004-TX/RX

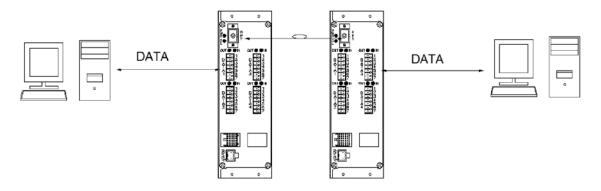


Model Number Key

DF	10 bit rack/module		
F	8 bit rack/module		
MF	8 bit module only		
V	Video		
D	Data		
Α	Audio		
CC	Contact Closure		

SM	Single mode
MM	Multimode
L	Long distance
D	Duplex

First digit	Number of video channels
Second digit	Number of audio channels
Third digit	Number of data channels
Forth digit	Number of contact closures
T	Transmitter
R	Receiver

Part Number Key

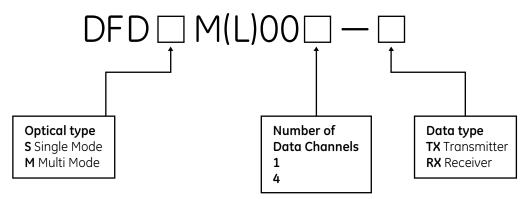

North America T 888-GE-SECURITY 888-437-3287

F 503-691-7566

Asia

T 852-2907-8108 F 852-2142-5063

Australia and New Zealand T 613-9239-1200

F 613-9239-1299

Europe

T 32-2-719-98-47 F 32-2-719-98-46

Latin America T 305-593-4301 F 305-593-4300

Specifications subject to change without notice.

© 2010 General Electric Company All Rights Reserved

Ordering Information

Fiber Type		Part Number	Description	Opt. PWR.	Opt. PWR. Budget dB		No. of slots	
				1310nm	1550nm			
(I) Sin (9/12:	(i) 1D	DFDSM001-TX	1-Ch. Bi-directional Data Transceiver	18	14	40	1	
(I) Single-mode (9/125µm)		DFDSM001-RX	1-Ch. Bi-directional Data Transceiver	18	14	40	1	
de	(ii) 4D	DFDSM004-TX	4-Ch. Bi-directional Data Transceiver	18	14	40	2	
		DFDSM004-RX	4-Ch. Bi-directional Data Transceiver	18	14	40	2	
(II) Sing	(i) 1D	DFDSML001-TX	1-Ch. Bi-directional Data Transceiver	25	19	60	1	
(II) Single-mode (9/125µm For Long Distance Transmission)		DFDSML001-RX	1-Ch. Bi-directional Data Transceiver	25	19	60	1	
e (9/125 Transm	(ii) 4D	DFDSML004-TX	4-Ch. Bi-directional Data Transceiver	25	19	60	12	
μm For iission)		DFDSML004-RX	4-Ch. Bi-directional Data Transceiver	25	19	60	2	
(III) MI (62.5/	(i) 1D	DFDMM001-TX	1-Ch. Bi-directional Data Transceiver	12	12	4	1	
(III) Multi-mode (62.5/125µm)		DFDMM001-RX	1-Ch. Bi-directional Data Transceiver	12	12	4	1	
	(ii) 4D	DFDMM004-T	4-Ch. Bi-directional Data Transceiver	12	12	4	2	
		DFDMM004-RX	4-Ch. Bi-directional Data Transceiver	12	12	4	2	
Access	ories	DER 10' Rack mount	chassis nurchased senarately fo	r housing module	ac			
Accessories Options		DFR. 19' Rack mount chassis purchased separately for housing modules ST type connector is standard						

Notes: Transmission distance will suffer if additional losses are introduced by the optical connectors, fusions, splices and the fibers within the network. Operating distance of multimode is limited by the characteristics of the fiber bandwidth

