Taymand TILT ILLUMINATION SYSTEMS TWIN

PLATINUM TWIN IR


The RM200 PLATINUM Twin illumination system is designed specifically for use with pan and tilt systems. RM200 Twin series provides World class performance, long life and ultra low maintenance. All PLATINUM illuminators incorporate the very latest surface mount LED's to deliver excellent night-time pictures with improved optical output and outstanding reliability.

RM200 Twin Systems are available in different angle variations which all deliver even output illumination. The system is supplied as two separate panels for optimal weight distribution on pan and tilt heads.

Each unit is fitted with Active LED Life Control to carefully control LED output, delivering consistent illumination power and a projected working life of 10 years.

RAYMAX illuminators are supplied with bracket and power supply. Control features on the power supply include adjustable power output, photocell and telemetry control. RM200 PLATINUM Twin illumination system is suitable for all PTZ installations up to 300 metres (984ft).



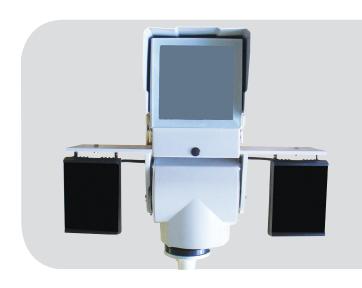

POWERFUL

- Distances up to 300m (984ft)
- PLATINUM^e LED technology
- Ultra high power -Low running costs

FLEXIBLE

- 2 Panel system for optimal weight distribution
- Mix and match angles as required (10° - 120°+)
- Fully Controllable Power Supply

RELIABLE

- 10 year life
- Active LED Life Control
- Vandal Resistant

CONTROLLED

- Zero Light Pollution
- Even Output Illumination
- Semi-Covert (850nm)

















PAN AND TILT OPTIMISED

For optimal weight distribution the system is provided as 2 LED panels which can be tilted either side of the camera housing. Each panel can be any angle to deliver twin narrow illuminators or a mixed narrow and wide angle system.



PLATINUM ADVANCED LED TECHNOLOGY

PLATINUM illuminators use cutting edge SMT LED technology together with Light Intensification Miniature Optics (LIMO™) and an enhanced Cool Running™ thermal management system into a single high performance LED. The result is World leading power, reliability and flexibility.



ACTIVE LED LIFE CONTROL

All Raytec illuminators employ cutting edge materials science techniques to improve thermal efficiency throughout the unit and ensure continuity of LED power. The New Advanced Cool Running™ system draws heat away from the LEDs, shielding the LED from abnormal stress, and allows Raytec LED products to deliver outstanding performance and consistency of illumination throughout the operational life of the illuminator.



VANDAL RESISTANT

The polycarbonate lens design protects against severe blows from crowbars, baseball bats and can even withstand successive shots from air pistols and rifles (range dependant).



ENERGY SAVING

All Raytec illuminators use high efficiency LED's and advanced control methods to deliver extremely low electrical consumption. Raytec illuminators are energy saving and deliver huge savings in running costs compared to traditional bulb illuminators.



HIGH DEFINITION LIGHTING


High Definition Lighting allows cameras to provide crystal clear, high signal images during the hours of darkness. The breakthrough in HD lighting is made possible with Raytec's high power LED technology delivering increased power on scene. High definition cameras require high definition lighting.

5 YEAR WARRANTY

All Raytec CCTV illuminators are provided with a 5 year warranty, unmatched anywhere in the CCTV lighting industry. Raytec illuminators provide guaranteed long life!



TECHNICAL SPECIFICATIONS



ILLUMINATOR

Max Distance: up to 300m (984ft) Angle: Various - See Part Codes

Optics: SMT LFD's

Consumption: 100W max (combined) Voltage: 13.5V current controlled

Weight: 1.4kg (3.1lbs)

(single panel)

Environmental: IP66

Temp Range: -50 to +50°C (-58 to 122°F)

Cable Length: 2.5m Colour: Black Wavelenath: 850nm

Dimensions: 180 x 135 x 65mm (single panel) 7" x 5.25" x 2.5" approx

BRACKETRY

Two U Brackets included.

SB1 Single bracket for top/pan/tilt mount Twin bracket for top/pan/tilt mount

POWER SUPPLY (to power both units)

Universal 100-240V AC Input:

auto-sensing

~100W max Output:

-50 to +50°C (-58 to 122°F) Temperature:

Weight: 1.5kg (3.3lbs)

Dimensions: 160mm x 160mm x 81mm

6" x 6" x 4" approx

Standard PSU (included)

Adjustable photocell Adjustable power output for IR

Telemetry Control

Premium PSU (add ~PR to part code) All standard PSU features PLUS:

Photocell following contact for switching of dual mode

12V dc output to power cameras

Pulsed PSU (add ~PU to part code)

To pulse Raytec lights in sync with cameras

NARROW ANGLE

Power Adjustment

Video In and Video Out connections to sync light and

12V dc output to power cameras

PART CODES & DISTANCES

RM200-PLT-10-10 200m (656ft) RAYMAX 200, 10+10 degree Twin PLATINUM illumination 850nm + PSU 300m (984ft) RM200-PLT-10-30 RAYMAX 200, 10+30 degree Twin PLATINUM illumination 850nm + PSU 220m (722ft) 140m (459ft) 140m (459ft) RM200-PLT-10-50 RAYMAX 200, 10+50 degree Twin PLATINUM illumination 850nm + PSU 90m (295ft) RM200-PLT-10-10-C 940nm + PSU RAYMAX 200, 10+10 degree Twin PLATINUM illumination Contact Raytec RM200-PLT-10-30-C RAYMAX 200, 10+30 degree Twin PLATINUM illumination 940nm + PSU Contact Raytec RM200-PLT-10-50-C RAYMAX 200, 10+50 degree Twin PLATINUM illumination 940nm + PSU Contact Raytec



Europe / Middle East: Tel: +44 (0) 1670 520055 Americas (Toll Free): Tel: +1 888 505 8335

Email: sales@rayteccctv.com Email: ussales@rayteccctv.com Web: www.raytecctv.com

WIDE ANGLE