


Available PoE Wattage At PoE Device

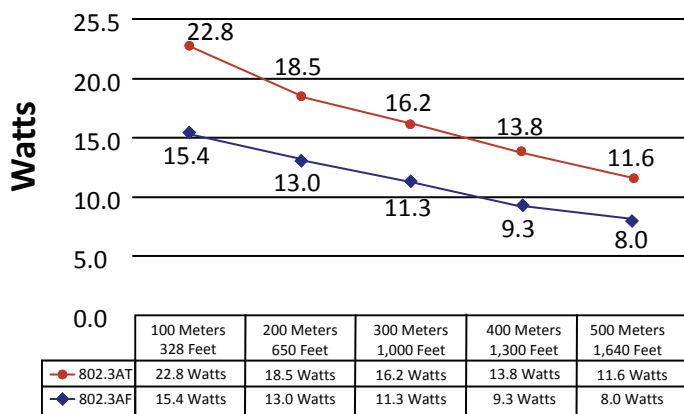

* Results charted were calculated using RG59U coaxial cable with a 20AWG center conductor and power sourcing equipment using IEEE 802.3AF standard with starting voltage of 48 volts DC and IEEE 802.3AT standard with starting voltage of 54 volts DC

Description

The **ET1500CW** is another component of NITEK's cutting edge *EtherStretch* line. Our *Etherstretch* solution allows for the utilization of existing cable infrastructure (coax or UTP) to transmit data from IP cameras and other network devices along with power (PoE) to operate these networked devices over the given wire media.

The **ET1500CW** is apart of a system containing a transmitter that is housed in a NEMA 4X polycarbonate high-impact ABS molded enclosure, which is ideal for use when installing the *Etherstretch* solution outdoors, and a receiver unit (single or multi-port). Both of the components requires very little installation time and absolutely no set up or configuration. The system can quickly turn ordinary RG59 coax cable into a high speed network communication and PoE pathway.

The **ET1500CW** is transparent to the network thus requiring no IP and MAC addressing. Simply connect your network devices to the networking ports of the transmitter and receiver along with existing cabling and the system begins communicating. LED indicators show the status of network communication and PoE power. The **ET1500CW** requires no network settings to be changed or adjusted.

NITEK's *EtherStretch* **ET1500CW** extends network communications to overcome cable distance limitations offering connectivity to devices in locations traditional networking does not allow. The ET1500CW is ideal for retrofitting existing installations.

Features

- Transmits up to distances of 500 meters (1600 feet)
- Transmitter is fitted into a NEMA 4X rated enclosure to support outdoor applications
- Supports mega-pixel technology
- Fully transparent to the network
- Supports any network device, including IP cameras
- Supports 10/100 and PoE over RG59 cables
- Easy to install, no set up required
- No MAC or IP addressing required
- LED indicators for network signals, link status and power
- Optional power supply can insert PoE power for non-PoE switches
- Surge protected inputs
- Ground loop isolation



USA

5410 Newport Drive, # 24
Rolling Meadows, IL 60008
Phone: (847) 259-8900
Fax: (847) 259-1300
E-mail: info@nitek.net
WWW.NITEK.NET

EUROPE

De Schans 19-21 2a
8231 KA Lelystad
Tel: +31(0)320-2300005
Fax: +31(0)320-282186
E-mail: info@nitek.nl
WWW.NITEK.NL



TECHNICAL SPECIFICATION

Network Transmission Device

Network Port	RJ45 Connector
Link Port	BNC Coax Jack
Ethernet	100BASE-TX Full Duplex
Dimensions	
Transmitter Enclosure	6.73" x 4.76 X 2.17
Receiver	1.1" x 1.6" x 5.1" including tabs & BNC
Operating Temperature	-15° to 60° C / 0° to 140° F
Shipping Weight	5 lbs

Common Installation Type

