


# HD Vari-Focal

## YV2.7x2.2SA-SA2

2.7x

Applicable camera (model) 1 2/3 1/2 1/3 1/4

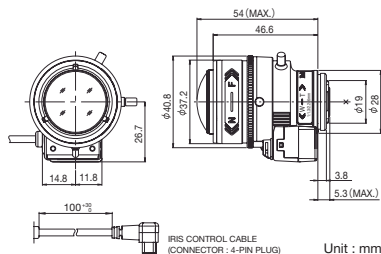

Unit : mm


Vari-Focal Wide Angle DC Auto Iris CS Mount Metal Mount ND Filter Long Cable Aspherical Lens Large Aperture Ratio RoHS Compliant  
**VARI WIDE DC CS-mt METAL ND 230 AT F1.3 RoHS**

**HD 3MP**

## YV2.8x2.8SA-SA2

2.8x

Applicable camera (model) 1 2/3 1/2 1/3 1/4

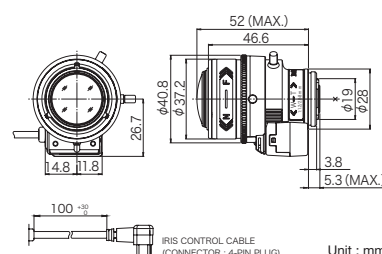

Unit : mm


Vari-Focal Wide Angle DC Auto Iris CS Mount Metal Mount ND Filter Long Cable Aspherical Lens Large Aperture Ratio RoHS Compliant  
**VARI WIDE DC CS-mt METAL ND 230 AT F1.2 RoHS**

**HD 3MP**

## YV4.3x2.8SA-SA2

4.3x

Applicable camera (model) 1 2/3 1/2 1/3 1/4

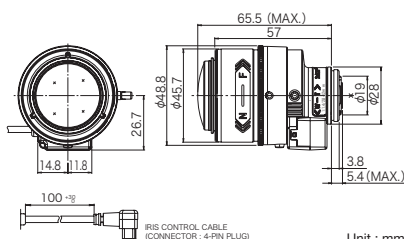

Unit : mm


Vari-Focal Wide Angle Long Focal DC Auto Iris CS Mount Metal Mount ND Filter Long Cable Aspherical Lens Large Aperture Ratio RoHS Compliant  
**VARI WIDE TELE DC CS-mt METAL ND 230 AT F1.4 RoHS**

**HD 3MP**

## YV3.3x15SA-SA2

3.3x

Applicable camera (model) 1 2/3 1/2 1/3 1/4

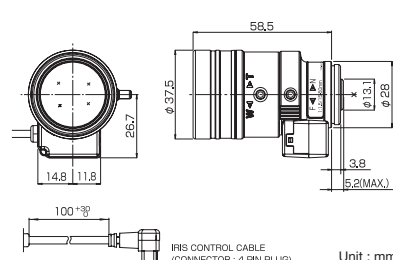

Unit : mm

Vari-Focal Long Focal DC Auto Iris CS Mount Metal Mount ND Filter Long Cable Aspherical Lens Large Aperture Ratio RoHS Compliant  
**VARI TELE DC CS-mt METAL ND 230 AT F1.5 RoHS**

**HD 3MP**

	Applicable to 1/3		Applicable to 1/3		Applicable to 1/3		Applicable to 1/3	
	YV2.7x2.2SA-SA2		YV2.8x2.8SA-SA2		YV4.3x2.8SA-SA2		YV3.3x15SA-SA2	
Focal Length (mm)	2.2 - 6 (2.7x)		2.8 - 8 (2.8x)		2.8 - 12 (4.3x)		15 - 50 (3.3x)	
Iris Range	F1.3 - T360(Equivalent to F360)		F1.2 - T360(Equivalent to F360)		F1.4 - T360(Equivalent to F360)		F1.5 - T360(Equivalent to F360)	
Operation	Zoom	Manual						
	Focus	Manual						
		Auto (DC type)*1						
Angle of View (H x V)	1/3"	WIDE	120° 00' x 91° 36'	100° 00' x 73° 45'	100° 02' x 74° 03'	18° 08' x 13° 34'		
		TELE	46° 26' x 34° 59'	35° 03' x 26° 18'	23° 26' x 17° 36'	5° 35' x 4° 12'		
	1/4"	WIDE	91° 36' x 69° 21'	73° 45' x 54° 49'	74° 03' x 55° 06'	13° 34' x 10° 10'		
		TELE	34° 59' x 26° 18'	26° 18' x 19° 44'	17° 36' x 13° 13'	4° 12' x 3° 10'		
Angle of View (H x V)	1/3"	WIDE	129° 43' x 75° 23'	109° 50' x 59° 51'	109° 33' x 60° 08'	19° 46' x 11° 04'		
		TELE	50° 30' x 28° 38'	38° 11' x 21° 29'	25° 31' x 14° 23'	6° 04' x 3° 26'		
	1/4"	WIDE	99° 23' x 56° 53'	80° 39' x 44° 38'	80° 56' x 44° 51'	14° 47' x 8° 18'		
		TELE	38° 04' x 21° 31'	28° 39' x 16° 07'	19° 10' x 10° 48'	4° 34' x 2° 35'		
Focus Range (From the Lens Front) (m)			∞ - 0.3				∞ - 0.8	
Mass (g)	55		50		80		60	

\* 1 : The iris automatically closes when the camera is turned off.

※ Each of the above products is also available in manual type.

※ Each of the above products is also available in long cable type (230 mm).