

dual video transmitter



Description

The ComNet™ FVT20 dual video transmitter supports two independent AM video signals in one module on two independent multimode fiber optic cables. The module is not a multiplexer. The module is ideal for CCTV installations and can be used to double the fixed video capacity of the C1 rack for up to 28 independent video channels per card cage. Packaged in the exclusive ComNet ComFit housing, these units may be either wall or rack-mounted, or may be DIN-rail mounted by the addition of ComNet model DINBKT1 adaptor plate. The FVT20 video transmitter is compatible with the FVR11M, FVR10M, FVR21, and FVR22 receivers. Plug-and-play design ensures ease of installation requiring no electrical or optical adjustments. The transmitter incorporates a bi-color (Red/Green) indicating LED for monitoring proper system operation.

Applications

- CCTV (Fixed Video)

Features

- AM Video Transmission
- NTSC, PAL, SECAM compatible
- Full color compatibility
- No in-field electrical or optical adjustments required
- Voltage transient protection on all power and signal input/output lines provides unconditional protection from power surges and other voltage transient events.
- Bi-Color (Red/Green) Video Present indicator
- Lifetime Warranty

* This unit is not a multiplexer



specifications

VIDEO

Video Input:	1 volt pk-pk (75 ohms)
Bandwidth:	5 Hz - 10 MHz
Differential Gain:	<5%
Differential Phase:	<5°
Tilt:	<1%
Signal-to-Noise Ratio (SNR):	60 dB
Max. RG-59 COAX Distance:	100m (300ft) Camera to Fiber Optic Module to maintain 6Mhz Bandwidth

WAVELENGTH

850 nm, Multimode

NUMBER OF FIBERS

2

CONNECTORS

Optical:	ST
Power:	Terminal Block
Video:	BNC (Gold Plated Center-Pin)

LED INDICATOR

- Video Present

ELECTRICAL & MECHANICAL

Power:	8-15 VDC @ 80 mA
vCircuit Board:	Meets IPC Standard
Size (in./cm) (LxWxH):	
Surface Mount:	6.1 x 5.3 x 1.1 in., (15.5 x 13.5 x 2.8 cm)
Shipping Weight:	<1 lb./0.45 kg

ENVIRONMENTAL

MTBF:	>100,000 hours
Operating Temp:	-40° C to +75° C
Storage Temp:	-40° C to +85° C
Relative Humidity:	0% to 95% (non-condensing) [†]


[†] May be extended to condensation conditions by adding suffix '-C' to model number for conformal coating.



PART NUMBER	DESCRIPTION	FIBERS REQUIRED	FIBER	OPTICAL PWR BUDGET	MAX. DISTANCE [‡]
FVT20	Dual Video Transmitter (850 nm)	2	Multimode 62.5/125µm	14 dB	4 km (2.5 miles)
Accessories	9 Volt DC Plug-in Power Supply, 90-264 VAC, 50/60 Hz (Included)				
Options	Add '/C' for Conformally Coated Circuit Boards (Extra charge, consult factory)				
	DIN-Rail Mounting Adaptor Plate Kit – With mounting hardware (Optional, order model DINBKT1)				

[‡] Distance may be limited by optical dispersion.

Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

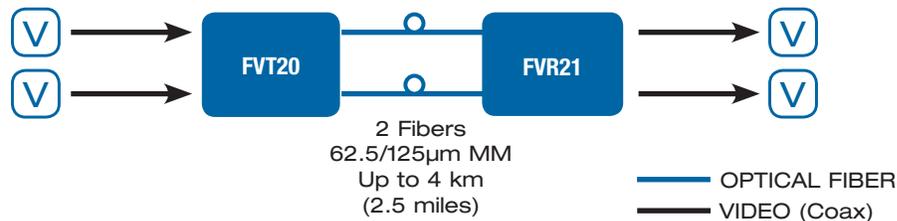

3 CORPORATE DRIVE | DANBURY, CT 06810 | USA
T: 203.796.5300 | F: 203.796.5303 | TECH SUPPORT: 1.888.678.9427 | INFO@COMNET.NET
8 TURNBERRY PARK ROAD | GILDERSOME | MORLEY | LEEDS, UK LS27 7LE
T: +44 (0)113 307 6400 | F: +44 (0)113 253 7462 | INFO-EUROPE@COMNET.NET