




## S40-2SLC-10

SFP+ 10GBase-LR Fiber Optic Transceiver module -10km - SM

### Overview

The UTC Fire & Security transceiver module is specifically designed to accommodate high-performance optical fiber, including integrated duplex data link over single mode.

The S40-2SLC-10 transceiver module features hot-plug capability for easy installation without interrupting host equipment operating online. The SFP+ transceiver module can install into UTC Fire & Security switch products with 10GBase-LR SFP+interface.

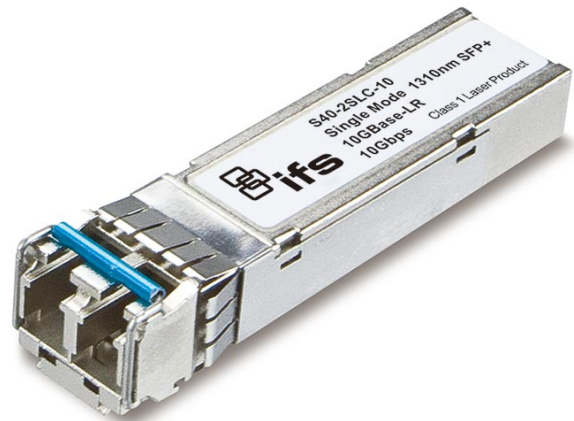

### Standard Features

- Flexible SFP+ package
- Complies with the IEEE 802.3ae 10 Gigabit Ethernet Standard
- Class 1 laser safety standard IEC 60825 compliant
- LC duplex receptacle
- Low power dissipation
- Plug-and-play capability for easy installation
- Hot Pluggable
- 0°C to +70°C operation temperature
- TTL signal detect indicator
- Single power supply 3.3V

# S40-2SLC-10

SFP+ 10GBase-LR Fiber Optic Transceiver module -10km - SM

## Specifications

### SFP specific features

#### General

Number of Fibers :	2
Fiber Type :	Single-Mode
Max. Distance :	10km
TX Wavelength	1310nm
Datarate :	10Gbps
PHY Type :	10GBase-LR
Power Budget	10dB

#### Electrical and Mechanical

Input Voltage	3.3V DC
Dimensions (W x D x H)	2.20 x 0.59 x 0.49 in. (59 x 15 x 12.4 mm)
Weight (ounces, grams)	0.6 oz, 18g
Reliability	>50,000 hrs @ 25° C

#### Environmental Specifications

Operating Temperature :	0°C ~ +70°C
Operating Relative Humidity :	5%~95% (non-condensing)
Storage Temperature :	-40°C ~ +85°C
Storage Relative Humidity :	5%~95% (non-condensing)

#### Electrical Specification

Input Voltage :	3.3V DC
AS/NZS CISPR 22 :	2006

#### Reliability

MTBF :	> 50,000 hrs @ 25°C
--------	---------------------

#### Standards Conformance

Standards Compliance :	IEEE 802.3ae 10 Gigabit Ethernet Standard
Standards Compliance :	Class 1 laser product complies with EN 60825-1

## Ordering Information

Part No.	Description
S40-2SLC-10	SFP+ 10GBase-LR Fiber Optic Transceiver module -10km - SM

