

LE-24



IPS
LED

Incorporated with advanced OptiCom™ Technology, the LE-24 FHD display sitting on a height adjustable stand fits perfectly for home and office applications.

AG Neovo's advanced OptiCom™ Technology eliminates emission of harmful blue light and bothersome flicker to reduce eye fatigue and dryness when viewing the display constantly. The 24" LE-24 also features an IPS panel with full HD resolution and 20,000,000:1 contrast ratio for superior picture clarity and colour performance. Sitting firmly on a height adjustable stand, users are able to tilt, pivot, swivel and adjust the screen's height for optimized viewing comfort. All this and more make the LE-24 ideal for home and office multimedia applications.

- > 24" widescreen LED display
- > LED-backlit technology with high FHD 1920 x 1080 resolution
- > Advanced OptiCom™ Technology: Anti-blue light and flicker free technologies for eye protection and viewing comfort
- > IPS panel provides consistent and accurate colour from all viewing angles
- > Slim housing design and widescreen format
- > Excellent clarity with ultrahigh 20,000,000:1 dynamic contrast ratio
- > Superior colour performance and colour contrast
- > HDMI input for Full HD connectivity with multimedia devices
- > Built-in speakers (2W x 2)
- > Height adjustable stand: tilt, pivot, swivel, height adjustable for multiple viewing options
- > Energy efficiency
- > VESA mount standard



OptiCom™ Technology- Anti-blue light and flicker free technologies for eye protection and viewing comfort

LE-24

Specifications

LE-24


| | | |
|-----------------------------|-----------------------------|--|
| Panel | Panel Type | LED-Backlit TFT LCD (IPS Panel) |
| | Panel Size | 23.6" |
| | Max. Resolution | FHD 1920 x 1080 |
| | Pixel Pitch | 0.272 x 0.272 |
| | Brightness | 250cd/m ² (Typical) |
| | Contrast Ratio | 20,000,000:1 (DCR) |
| | Surface Treatments | Hard Coating (3H) Anti-glare treatment |
| | Viewing Angle (H/V) | 178°/178° |
| | Display Colour | 16.7M |
| | Response Time | 7ms (GTG) |
| Frequency (H/V) | H.Freq | 30kHz – 83kHz |
| | V.Freq | 56Hz – 76Hz |
| Input | VGA | 15-Pin D-Sub |
| | DVI | 24-Pin DVI |
| | HDMI | HDMI |
| Audio | Audio In | 1 x stereo audio in for PC (audio jack, 3.5 Ø) |
| | Speaker | 2W x 2 |
| Power | Power Supply | Internal |
| | Power Requirements | 100 – 240 V, 50-60 Hz |
| | Consumption | < 35W (On) < 0.5W (Stand-by) < 0.5W (Off) |
| Operating Conditions | Temperature | 0°C ~ 40°C (32°F ~ 104°F) |
| | Humidity | 10% ~ 85% |
| Mounting | VESA FPMPMI | Yes (100 x 100mm) |
| Stand | Tilt Capacity | -5° ~ 22° |
| | Swivel | ±160° |
| | Pivot Capacity | 0° ~ 90° |
| | Height Adjustment | 0 ~ 130 mm |
| Dimensions | with Base (W x H x D) | 571.4 x 554.7 x 244.5 mm (22.5" x 21.8" x 9.6") |
| | w/o Base (W x H x D) | 571.4 x 350.9 x 48.1 mm (22.5" x 13.8" x 1.9") |
| | Packaging (W x H x D) | 694 x 443 x 180 mm (27.3" x 17.4" x 7.1") |
| Weight | Product Weight (with base) | 5.6 kg (12.3 lbs) |
| | Product Weight (w/o base) | 3.3 kg (7.3 lbs) |
| | Packaging Weight | 7.3 kg (16.1 lbs) |
| Regulation Approval | Certifications & Compliance | CB, CE, RoHs, FCC, BSMI, WEEE |
| Accessories | Supplied | CD ROM (user manual), warranty card, power cord, 15-Pin D-Sub cable, Audio cable |



Advanced OptiCom™ Technology: Anti-blue light and flicker free for a more comfortable viewing experience



Built-in HDMI input makes the LE-24 easy to be paired with Full HD multimedia advices

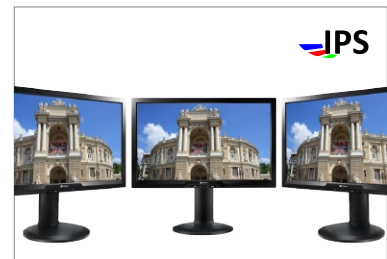

IPS panel provides superb clarity from all angles



Ergonomically-designed stand allows users to tilt, pivot, swivel and adjust the height to its ideal position

