

## PM-32



LED 

Equipped with USB playback, DLNA compliance and built-in speakers, PM-32 offers multimedia lovers superior sharing experience for various indoor digital signage applications.

Designed for professional multimedia applications, the PM-32 is built on the advanced technologies of DLNA compliance, USB playback and versatile connectivity. Media contents can be shared and managed via Ethernet cable within all DLNA compliant media devices in local network. Featuring Full HD resolution and an IPS panel, it ensures exceptional and accurate colour performance from all viewing angles. 32" FHD public signage display equipped with built-in scheduler and RS-232/RJ45 remote control function allows easy digital signage installation and management. With a built-in programmable scheduler that enables them to be automatically activated for playing selected AV materials and turned off at any pre-set time. The Anti-Burn-in™ technology and Built-in Image Enhancer ensure reliable operations in professional digital signage applications.

- > LED-Backlit technology with Full HD resolution
- > IPS panel for wide viewing angle
- > 11.9 mm (left/right/top) and 17.2 mm (bottom) slim bezel width
- > Anti-Burn-in™ technology
- > Built-in Image Enhancer: 3D Comb Filter/ Deinterlace/ Noise Reduction
- > USB playback function
- > DLNA compliance
- > Versatile connectivity: VGA, DVI, HDMI, Composite, Component
- > RS-232 in/out, RJ45 and IR in/out for remote control
- > Built-in scheduler allows different programme scheduling
- > Built-in speakers (10W x 2)




# PM-32

## Specifications

## PM-32

<b>Panel</b>	Panel Type	LED-Backlit TFT LCD (IPS panel)
	Panel Size	31.5"
	Max. Resolution	1920 x 1080
	Brightness	350 cd/m <sup>2</sup> (Typical)
	Contrast Ratio	1,400 : 1 (Typical)
	Viewing Angle (H/V)	178°/178°
	Display Colour Response Time	16.7M 4ms (GTG)
<b>Frequency (H/V)</b>	H.Freq	31 kHz – 92 kHz
	V.Freq	48 Hz – 85 Hz
<b>Input</b>	VGA	15-Pin D-Sub
	DVI	24-Pin DVI-D
	HDMI	HDMI
	Component	RCA x 3
	CVBS	RCA (share with Component -Y)
<b>External Control</b>	RS-232 in/out	2.5 mm jack
	LAN	RJ45
	IR in/out	3.5 mm phone Jack
<b>Audio</b>	Audio In	1 x stereo audio in for PC (audio jack, 3.5 Ø) 1 x Stereo audio in (RCA)
	Audio Out Internal Speaker	1 x Stereo audio out (RCA) 10W x 2
<b>Other Connectivity</b>	USB Port	USB 2.0
	<b>Power</b>	Power Supply Power Requirements Consumption
<b>Operating Conditions</b>	Temperature	0°C ~ 40°C (41°F~104°F)
	Humidity	20%~80% (No condensation)
<b>Storage Conditions</b>	Temperature	-20°C ~ 60°C (-4°F~140°F)
	Humidity	15%~95% (No condensation)
<b>Mounting</b>	VESA FPM PMI	Yes (200 x 200 mm & 100 x 100 mm)
<b>Dimensions</b>	w/o base (W x H x D)	727 x 425 x 64 mm (28.6" x 16.7" x 2.5")
	Packaging (W x H x D)	818 x 547 x 139 mm (32.2" x 21.5" x 5.5")
<b>Weight</b>	w/o base	5.2 kg (11.5 lbs)
	Packaging	7.8 kg (17.2 lbs)
<b>Regulation Approval</b>	Certifications & Compliance	CB, CE, FCC, WEEE, RoHS, REACH
<b>Accessories</b>	Supplied	User manual CD, Remote control, Power cord, 15-Pin D-Sub cable, RS232 cable

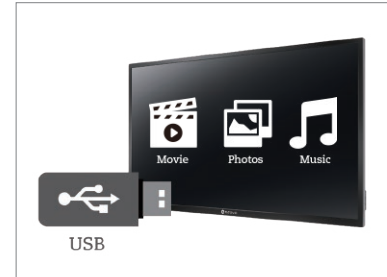

USB Playback for easy multimedia content presenting



Versatile connectivity: VGA, DVI, HDMI, Composite, Component



Built-in scheduler automatically activates and deactivates the PM-32 with designated input signal according to programmed schedules



RS-232/ RJ45/IR for remote control