

FTD100

Card Module 8-bit Digital 1-ch Video



Description

The FTD100 8-Bit Digital Video transmission product, features high-performance laser-based optics for the clearest, most reliable data transmission over one fiber for both single and multi-mode with no video degradation over the entire operating distance (up to 20km).

This plug-and-play product provides instant product compatibility for most major security manufacturers' equipment and reliability in harsh environments, a perfect compliment to any commercial, government or intelligent transportation application. The product operates in FT-C18 Rack Mount Chassis.

These units are compatible with the FTD100Micro transmitters/receivers and FTD100-XXR3 receivers.



Features

Video

- ▶ NTSC or PAL video standards supported
- ▶ Non-compressed 8-bit digitally encoded video
- ▶ No video degradation over the maximum operating distance

Optical

- ▶ One fiber design
- ▶ High performance laser-based optics
- ▶ Multimode or Singlemode
- ▶ ST or FC connectors available


Robust Design

- ▶ Plug-and-Play design, no in-field adjustments required.
- ▶ Hot-swappable design
- ▶ Wide operating temperature range of -40°C to +75°C
- ▶ Designed for use in harsh environments

Warranty

- ▶ Comprehensive Lifetime Warranty

Typical Application

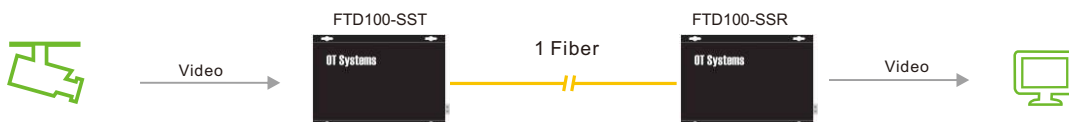

Specifications

Video

Number of Channels	1
Format	NTSC/PAL/SECAM
Input/Output	1 Volt pk-pk (75 ohms)
Bandwidth	>=6MHz
Differential Gain	<1% Typical
Differential Phase	<1 Degree Typical
SNR-CCIR weighted	>60dB

LED

Video Signal Indication (Presence)	Green LED lit
Optical Carrier Detected	Yellow / Active
Power	Red / On

Connectors

Video Input / Output	BNC
Optical Input / Output	ST (standard), FC (optional)
Power (Rack-Mount)	Bus connector

Electrical and Mechanical

Power	From FT-C18 Chassis
Dimensions(WxHxD)	148 x 20.4 x 213mm(Max)
Shipping Weight	0.16kg

Environmental

Operating Temp	-40°C to +75°C
Storage Temp	-40°C to +85°C
Relative Humidity	0 to 95% non-condensing
MTBF	> 100,000 hours

Video Transmission

Ordering Information

Fiber Type	Part Number	Description	Wavelengths (nm)	Optical Power Budget (dB)	Max. Distance (Km)	No. of slots
Multi-mode (62.5/125µm)	FTD100-SMT	1- ch Video Transmitter	1310	23	4	1
	FTD100-SMR	1- ch Video Receiver				
Single-mode (9/125µm)	FTD100-SST	1- ch Video Transmitter	1310	17	20	1
	FTD100-SSR	1- ch Video Receiver				

Options	<ul style="list-style-type: none"> ST type connector is standard. For FC type, specify "F" in the suffix. E.g. FMT. Please feel free to consult factory if longer transmission distance is required.
Rack Mount Chassis	<ul style="list-style-type: none"> FT-C18 is to be purchased separately. Please refer to accessories section for the details.

Notes:

- Transmission distance will suffer if additional losses are introduced by the optical connectors, fusions, splices and the fibers within the network.
- Operating distance of multimode is limited by the characteristics of the fiber bandwidth.
- Please feel free to consult factory for any special requirement and customization.



OT Systems Ltd., November 2013

Due to continuous improvement, all product specifications are subject to change without further notice.