



# OUT OF THE BOX



The Samsung SND-6084/FPC camera with Facit pre-installed App combines people counting with video surveillance

## People Counting – with bi-directional perspective mode

### People counting typical usage

includes retail analysis for store efficiency by calculating the ratio of people entering a retail environment versus actual sales at POS. It can also be used to manage resource levels effectively at checkout by measuring patterns of individual sales peaks and troughs.

### Perspective mode

unique to Samsung cameras. All other people counters have to be positioned vertically above an entrance to count accurately. The Samsung SND-6084/FPC can be placed at an angle, so the camera can have dual use for security surveillance as well as counting people for sales & marketing data.

### Configuration & management

is designed to be operator friendly while the systems' reporting gives you a dashboard view of critical activity across your retail environments.

### The Samsung SND-6084/FPC camera

has been certified and tested by Facit.

### Web based user interface

enables remote software set up & configuration.

### Network integration

allows real-time counts over the network.

### Automated Reporting

can be set up daily, weekly or monthly.

### Report delivery

by email or FTP.

### Real time graphs


with hourly, daily and weekly breakdown.

### Performance comparison

by plotting the average.

### Trend analysis

with single view weekly reporting.



# SND-6084/FPC

2MP Full HD Network Dome Camera

## Specifications


- Max. 2M (1920 x 1080) resolution
- 0.03Lux@F1.2 (Color), 0.002Lux@F1.2 (B/W)
- 3 ~ 8.5mm (2.8x) motorized varifocal lens
- H.264, MJPEG dual codec, Multiple streaming
- WDR (120dB), Simple focus (Motorized V/F), P-Iris, Defog
- Audio / Face / Motion detection
- Multi-crop streaming
- SD/SDHC/SDXC memory slot
- PoE, UPnP, Bi-directional audio support



SND-6084/FPC	
<b>TO ACHIEVE 95%+ ACCURACY HARDWARE NEEDS TO BE SET AS FOLLOWS:</b>	
Min height/distance of lens to entrance/floor	3m height at 2.5m distance
Max height/distance of lens to entrance/floor	4m height at 3.5 distance
Max people reading	up to 2 people simultaneously every second.
Report storage over 12 months activity and reporting can be stored with an on-board micro SD card	

## Dimensions

Unit : mm (inch)

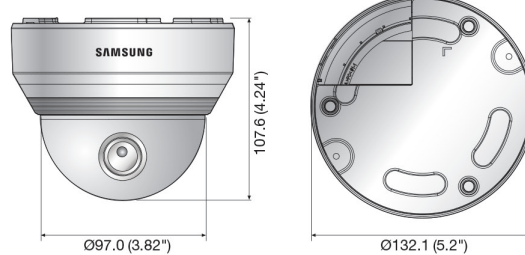

## Accessories (Optional)



■ DISTRIBUTED BY



### HANWHA TECHWIN EUROPE LTD.

2nd Floor, No. 5 The Heights, Brooklands, Weybridge, Surrey, KT13 0NY, UK  
Tel : +44-1932-82-6700 Fax: +44 1932 82 6701 www.samsung-security.eu  
COPYRIGHT BY HANWHA TECHWIN. ALL RIGHTS RESERVED

**SAMSUNG**