


▶ 65" Slim Bezel LCD Display

# PM-65P

Preliminary Specification

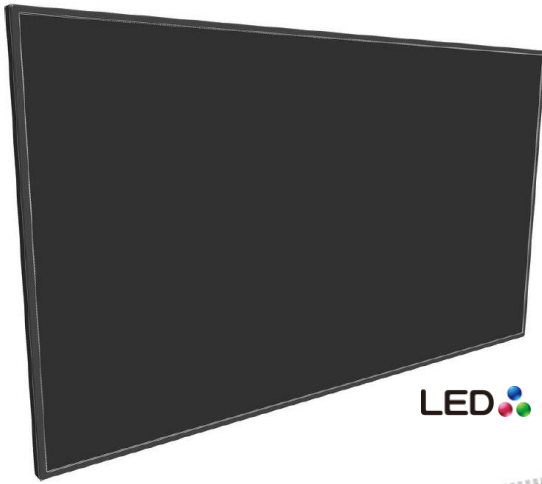

LED 



## ▶ FEATURES

- LED-Backlit technology with FHD resolution
- 13.9mm (left/right/top) and 14.9mm (bottom) slim bezel width
- Anti-Burn-in™ technology
- Built-in Image Enhancer: 3D Comb Filter/Deinterlace/Noise Reduction
- Connectivity: VGA, DVI, HDMI, Component, CVBS, DisplayPort
- Daisy chain: VGA, DVI, DisplayPort and RS-232
- Tiling function for easy video wall setup (Up to 10 x 10)
- USB playback: Plays back photos, music and videos by connecting the USB-compatible device
- DLNA function: easy sharing and playing digital content with DLNA compliant devices via local network
- RS-232 (in/out), IR (in/out) and RJ45 allow remote control
- OPS slot for easy media player integration
- Built-in scheduler allows different programme scheduling
- MVA panel offers wide viewing angles up to 178 degrees
- Built-in speakers (10W x 2)
- Ideal for 16/7 operations

## ▶ SPECIFICATION

<b>Panel</b>	Panel Type	LED-Backlit TFT LCD (MVA panel)
	Panel Size	65"
	Max. Resolution	1920 x 1080
	Brightness	350 cd/m <sup>2</sup>
	Contrast Ratio	4,000 : 1
	Viewing Angle (H/V)	178°/178°
	Display Colour	1.07 billion
	Response Time (GTG)	6.5 ms
<b>Frequency (H/V)</b>	H.Freq	31 kHz – 92 kHz
	V.Freq	48 Hz – 85 Hz
<b>Input</b>	VGA	15-Pin D-Sub
	DVI	24-Pin DVI-D
	HDMI	HDMI x 2
	Component	BNC x 3
	CVBS	BNC (share with Component-Y)
	DisplayPort	DisplayPort
	LAN	RJ45
	USB	USB Type A
<b>Output</b>	VGA/DVI	30-Pin DVI-I
	DisplayPort	DisplayPort x 2
<b>External Control</b>	RS-232 in/out	2.5mm Phone jack
	LAN	RJ45
	IR In/Out	3.5 mm phone Jack
<b>Audio</b>	Audio In	1 x stereo audio in for PC (audio jack, 3.5 Ø) 1 x Stereo audio in (RCA)
	Audio Out	2.5mm phone jack (RS-232C)
	Internal Speaker	10W x 2
	External Speaker	10W x 2
<b>Other</b>	OPS Slot	Yes
<b>Connectivity</b>	USB Port	USB 2.0
<b>Power</b>	Power Supply	Internal
	Power Requirements	100 – 240V, 50 – 60Hz
	Consumption	<170 W (On) < 0.5 W (Active off/Off)
<b>Operating Conditions</b>	Temperature	0°C ~ 40°C (32°F ~ 104°F)
	Humidity	20%~80% (No condensation)
<b>Storage Conditions</b>	Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
	Humidity	15%~95% (No condensation)
<b>Mounting</b>	VESA FPMPI	Yes (400 x 400 mm)
<b>Dimensions</b>	w/o base (W x H x D)	1459 x 835 x 82 mm (57.4" x 32.9" x 3.2")
	<b>Net Weight</b>	w/o base
<b>Regulation Approval</b>	Certifications & Compliance	FCC, CB, CE, WEEE, RoHS, REACH
<b>Accessories</b>	Supplied	CD ROM (user manual), Remote control, RS-232 daisy chain cable 1.8m, 15-Pin D-Sub cable 1.8m, AC power cord 1.8m, AAA batteries, RS-232 cable

All specifications are subject to change without prior notice

[www.agneovo.com](http://www.agneovo.com)

Copyright © 2016 AG Neovo. All rights reserved.  
The name AG Neovo is a trademark of Associated Industries China, Inc.  
All other trademarks are the property of their respective owners.