




**Pro-Quality at Great Value**




**Copy  
128GB  
in 6 mins**

**Built in slot**



**Optional adapter**



## NEXTO VIDEO STORAGE DOC



### Small & Light

- Palmtop size with light weight(430g/15oz).
- Perfect companion for Documentary DP.



### Preview 2K / 4K

- Show video on 2.4' TFT LCD.  
(Limited preview performance for 4K)
- DV, DVCPRO HD
- AVCHD, H.264, AVC-Intra
- MPEG2 4:4:4 / 4:2:2 / 4:2:0
- XAVC 2K/4K, AVC Ultra 2K/4K
- XF-AVC 2K/4K, PRORES 2K/4K, DNxHD 2K/4K
- ARRI RAW, RED RAW (Thumbnail only)



### Simultaneously Backup up to TWO drives with a *single operation* (MCopy)

- *Create two copies* with 1 internal hard drive and 1 external USB3.0 (or RAID) drive



### Limitless capacity

- One click easy exchange of internal drive .
- Compatible with 2.5' SATA HDD/SSD.  
(9.5mm or less height)




### Backup from various memory cards

- Built in SxS / CFast / SDXC slot
- Supports XQD / P2 / CF through optional adapter.
- Supports FAT32, exFAT, UDF, HFS+



### Incremental Copy

- Maximize the safety while minimizing storage space.
- Copy only the data that have changed since the last backup.




NVS2801

## Exchangeable internal Drive


The internal drive of NVS2801 can be exchanged by user.

- ① Insert silicon rubber jacket to the hard drive or SSD.
- ② Slide in the drive to the internal drive slot of NVS2801.
- ③ Install the aluminum back cover to the NVS2801.
- ④ Use a coin to tighten the screws on the aluminum back cover.

## Incremental copy

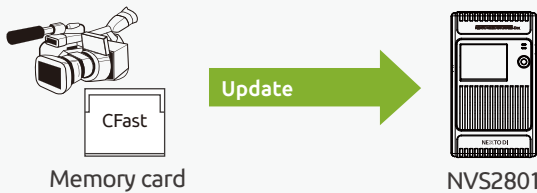


Keep the contents of Nvs\_Data the same as memory card data  
Move erased file to Nvs\_Trash folder and keep the contents the same.  
Change files also moved to Nvs\_Trash folder.

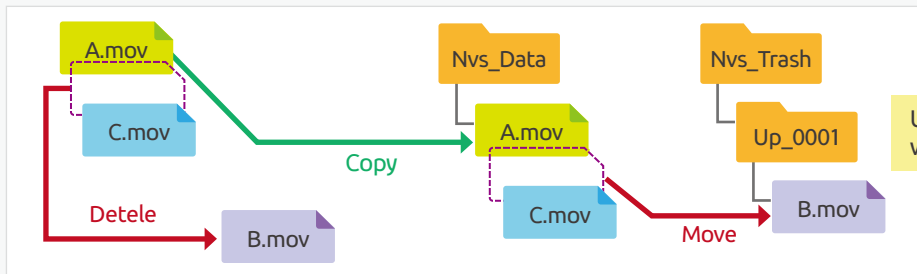

Up\_xxxx folder is created at each [Update] when there are changed or deleted files.

## Technical Specifications

Model Name	NEXTO VIDEO STORAGE Doc	
Model Number	NVS2801	
LCD	2.4" Color TFT LCD: 320*240, 64K color	
Memory Support	Built in slot : SxS(Pro/Pro+/-1), CFast(1.1&2.0), SD(SDHC/SDXC with UHS support)	
Storage	Internal Drive : 2.5" SATA hard drive with 9.5mm and less height.	
File System	Memory card : FAT16/32, exFAT, UDF, HFS+	
Video Preview	DV, DVCPRO HD AVCHD, H.264, AVC-Intra MPEG2 4:4:4 / 4:2:2 / 4:2:0 XAVC 2K/4K, AVC Ultra 2K/4K	XF-AVC 2K/4K, PRORES 2K/4K DNxHD 2K/4K ARRI RAW (Thumbnail only) RED RAW (Thumbnail only)
Internal Battery	Rechargeable Li-Poly battery, 3.7V 4400mAh Operating time after full charge : 120min Rechargeable via AC adapter(5hrs), USB cable(12hrs)	
Computer I/F	USB 3.0 : 5Gbit/sec	
OS compatibility	Windows XP / VISTA / 7 / 8 / 10 (Windows XP requires exFAT patch update) MAC OS 10.6.5 or later, Linux 2.4.18 or later	
Power	Recommended : DC 12V/2A Operational range : DC ±6~25V $\pm$ 5% Operated by USB bus power during the computer connection	
Weight	430g / 0.95lb (with hard drive)	
Dimension	154 x 91 x 33 (mm) / 6 x 3.6 x 1.3 (inches)	
Contents	NVS2801 main unit / AC power adapter / USB3.0 cable / Rubber bumpers / Manual	

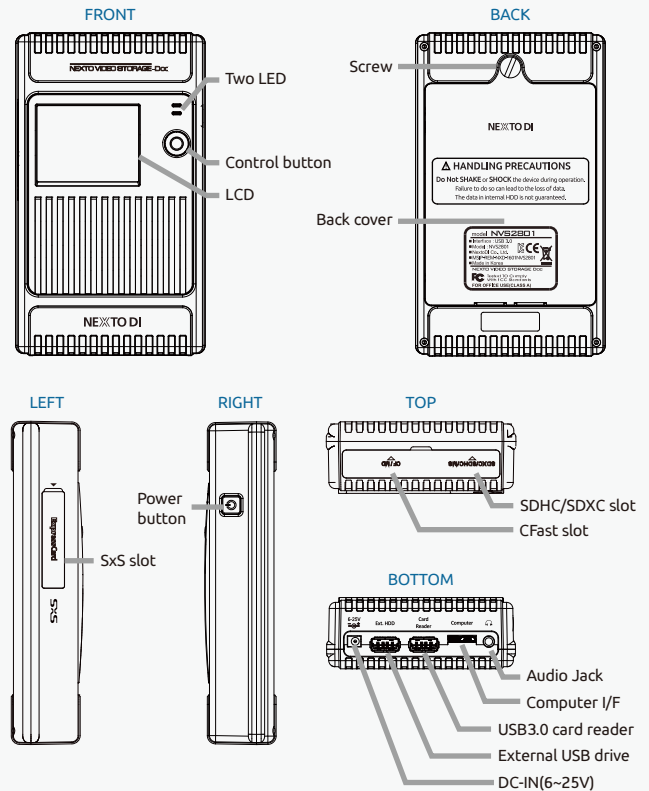

# NEXTO DI

E-702 Digital Empire B/D 16, Deogyong-daero 1556 beon-gil,  
Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-702 Korea  
Tel. +82(0)313035370 Fax. +82(0)313035380 www.nextodi.com

©2016 NextoDI Co., Ltd. All rights reserved.  
Features and specifications subject to change without notice.  
"NextoDI", "NEXTO VIDEO STORAGE DOC", "NVS", "NVS2801" and "X-Copy" are registered trademarks and property of NextoDI Co., Ltd. Republic of Korea  
"Sony" "SxS PRO" and "SxS PRO+" are registered trademarks of Sony Corporation, Japan.  
"Panasonic" and "P2/P2E" are registered trademarks of Panasonic Corporation, Japan.  
"CompactFlash" is a registered trademarks of Sandisk Corp. "SD" is a trademarks of SD Card.  
"Windows" is registered trademark of Microsoft Corporation, US.  
"Mac OS" is a trademarks of Apple Inc. in the USA and other countries.  
All other trademarks are the property of their respective owners.