

- CC-28909BVF3** 1/3" Color Ex-View High Resolution Vandal-Proof Dome Camera
- CC-8909BVF3** 1/3" Color High Resolution Vandal-Proof Dome Camera
- CC-8709BVF3** 1/3" Color High Resolution Vandal-Proof Dome Camera
- CC-18809BVF3** 1/3" Color Vandal-Proof Dome Camera



3-AXIS




•Wall mounting



•Ceiling mounting

GKB has a new modified version of Vandal-Proof Dome camera serial and it now has 3 Axis gimbal.

The 3 Axis feature enables camera to be mounted on wall / ceiling without view restriction.

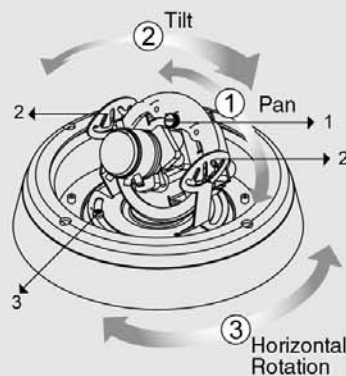

Legend :
 1 : Pan rotation
 2 : Tilt rotation
 3 : Horizontal rotation

COLOR CAMERA

COLOR DOME CAMERA

IR CAMERA

MONOCHROME CAMERA

DVR & IT PRODUCT

SPEED DOME

ACCESSORY

- CC-28909BVF3** 1/3" Color Ex-View High Resolution Vandal-Proof Dome Camera
- CC-8909BVF3** 1/3" Color High Resolution Vandal-Proof Dome Camera
- CC-8709BVF3** 1/3" Color High Resolution Vandal-Proof Dome Camera
- CC-18809BVF3** 1/3" Color Vandal-Proof Dome Camera




APPLICATIONS

Elevator, Bank, Department Store, Hospital, Hotel, Restaurant, School, Office Building, Train, etc.

FEATURES

- 1/3" Sony CCD, 1/3" Panasonic CCD.
- 550 TV Lines.
- 4.0mm to 8.0mm Manual Iris Vari-Focal Lens.
- Auto Back Light Compensation.
- Auto Electronics Shutter.
- Indestructible Metal Vandal-Proof Housing Design.
- Vandal-Proof Rating 300N.
- Line Lock is available for AC 24V Sony Chipped Camera.
- IP 66.
- 3-Axis.

DIMENSION (Unit: mm)

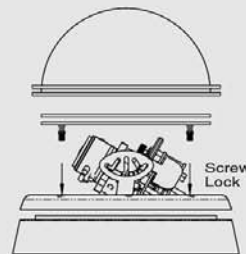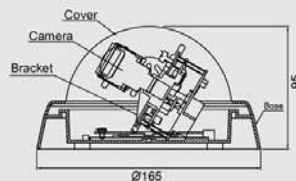

SPECIFICATION

Item NO.	CC-28909BVF3	CC-8909BVF3	CC-8709BVF3	CC-18809BVF3
Description	1/3" Color Ex-View High Resolution Vandal-Proof Dome Camera	1/3" Color High Resolution Vandal-Proof Dome Camera		1/3" Color Vandal-Proof Dome Camera
Pick up Element	Sony Ex-View CCD Image Sensor	Sony Super-Had CCD Image Sensor	Panasonic CCD Image Sensor	Sony SS-11 CCD Image Sensor
Number of Pixels		<NTSC> 768(H)× 494(V) <PAL> 752(H)× 582(V)		<NTSC> 510(H)× 492(V) <PAL> 512(H)× 582(V)
Back Light Compensation		ON-OFF		
Auto Electronics Shutter		ON-OFF		
Line Lock		ON		-
ATW		ON-OFF		
APG		-	ON-OFF	-
AGC		ON		
Sync. Mode		Internal Sync.		
Scanning System		2:1 Interlace		
Resolution		550 TV Lines		420 TV Lines
S/N Ratio		More than 48dB		
Gamma		0.45		
Minimum illumination	0.03 Lux, F 1.4	0.5 Lux, F 1.4		
Horizontal Sync. Frequency		<NTSC> 15.734 KHz <PAL> 15.625 KHz		
Video Output		1.0 Vp-p, 75 ohm		
Power Source		AC / DC (12-24)V (Switching Power)		
Power Consumption		3.6W		
Operating Temperature		-10°C to +60°C		
Waterproofing Criterion		IP 66		
Lens Amount		4.0-8.0mm / 9.0-22.0mm Manual Iris Vari-Focal Len		
Shutter Control		<NTSC> 1/60-1/100,000 sec. <PAL> 1/50-1/100,000 sec.		
Dimension		95(H)×165(Ø) mm		
Net Weight		0.9kg		
3Axis gimbal		YES		

Specifications are subject to change without prior notice.

COLOR CAMERA

COLOR DOME CAMERA

IR CAMERA

MONOCHROME CAMERA

DVR & IT PRODUCT

SPEED DOME

ACCESSORY