


EZN468M

4-Megapixel IR, Motorized,
Outdoor Bullet Network Camera


ONVIF

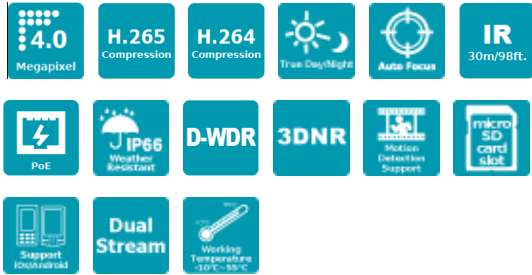

Features

- 4M CMOS sensor
- Motorized 2.8-12mm lens to capture the desired field of view
- Digital Wide Dynamic Range Function
- Provides True Day/Night functionality with automatic IR filter operation
- Extended IR range of up to 30m / 100ft. with 3 High Power IR LEDs (Depending on scene IR reflectivity)
- Multi-streaming from H.265 / H.264
- Supports Motion Detection & Email Notification
- Weather proof IP66-rated
- The flexible angle viewing with its 3-Axis rotation design allows wall or ceiling mounting
- Supports live monitoring of video from mobile devices via MobileFocus / MobileFocus Plus apps (iOS and Android)
- Supports Power over Ethernet / 12VDC
- EverFocus Genie XMS CMS
- ONVIF profile S compliant
- Supports Micro SD card


Dimensions

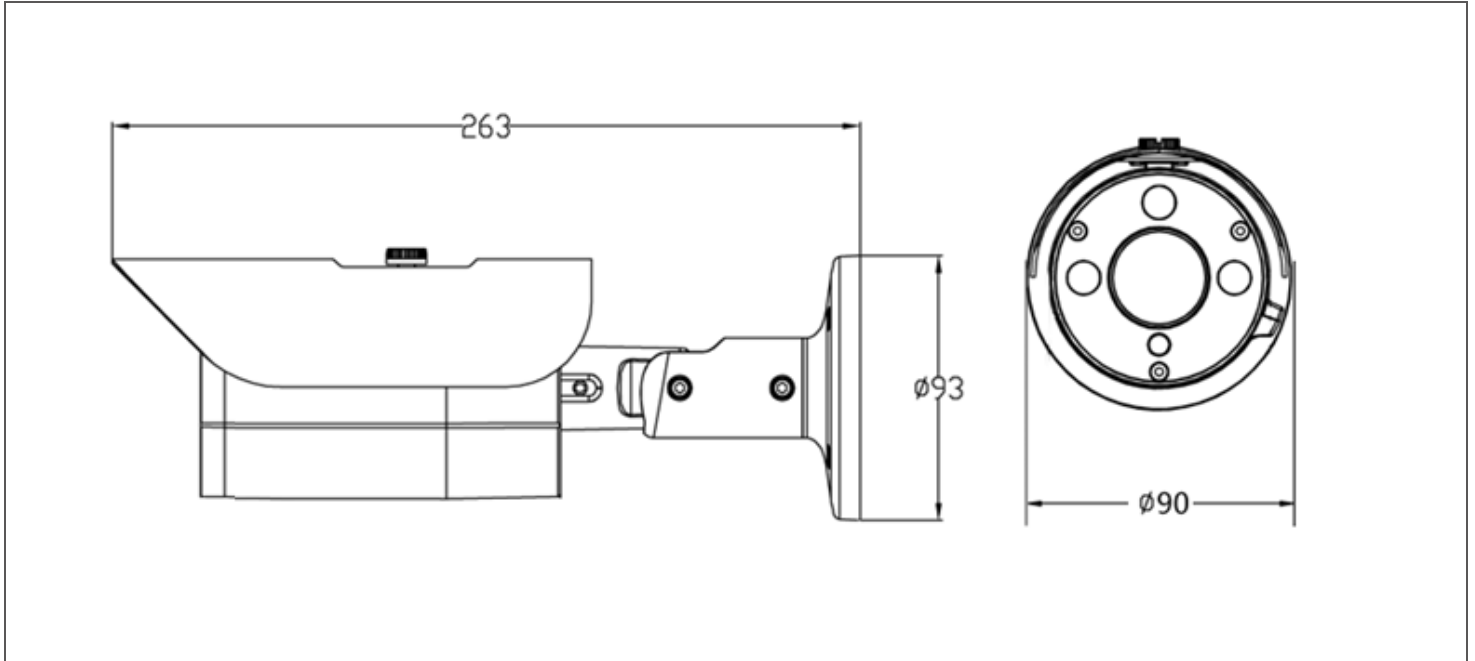

Optional Accessories

Brackets

PBOX-A32-1



Junction Box

Apple White

119.2 x 38mm / 4.7" x 1.5" (D) x (H)

- High-strength Aluminum for better protection against damage.
- Spray painted surface to protect the bracket from corrosion and rust.

IP Sidekick

IP Sidekick - ESK1000



Using it for installation, you do not need to pre-configure the IP address or to use an additional monitor to check and adjust all the IP cameras. The product can assign an IP address to the camera, and then you can connect and check the IP camera live view using our mobile app EF Sidekick. For details about IP Sidekick, please refer to the IP Sidekick – *ESK1000 User's Manual*.

PoE Switch

EverFocus 5 / 8 / 16 / 24 Ports PoE Switch



5 Ports: ES0501-40

8 Ports: ES0812-31 / ES0802-41

16 Ports: ES1625-31 / ES1645-51

24 Ports: ES2426-31 / ES2446-51 / ES2448-62

Specification

| | | | |
|-------------------------|--|------------------------|---|
| Model No. | EZN468M | | |
| Pickup Device | 4M CMOS sensor | Stream Type | Complex stream / Video stream |
| Lens | Motorized 2.8-12mm lens | Image Settings | Contrast, Brightness, Saturation, Sharpness, Mirroring of Images |
| Camera Angle Adjustment | Horizontal 360°, Vertical 90° | Intelligent Alarm | Video Loss, Network Anomaly, Tampering Alarm, Storage Exception, Motion Detection |
| Minimum Illumination | Color: 0.5Lux @F1.4 B/W: 0.2Lux @F1.4 | Event Trigger | Motion Detection |
| Day/Night | True Day/Night with ICR | Notification | Email Notification |
| Iris | Fixed Iris | Password Protection | Support |
| Electronic shutter | Auto / Manual (1/25 ~ 1/10,000), FLK | Storage | Micro SD / SDHC / SDXC slot (Max. 128G, up to class 10) |
| Video Compression | H.265 / H.264 | IR LED | 3 (High Power IR LEDs) |
| Max. Video Resolution | 2592 x 1520 | IR Distance | 30m / 100ft. |
| Frame Rate | 25fps / 30fps | Power Supply | 12VDC |
| S/N Ratio | ≥ 35db (AGC OFF) | Power over Ethernet | PoE IEEE802.3af (Class 3) |
| AGC | Yes | Max. Power Consumption | 12VDC 7.4W / PoE 8.2W |
| AWB | Yes | Humidity | 0% ~ 90% not condensing |
| D-WDR | Yes | Operating Temperature | -10°C ~ 50°C / 14°F ~ 122°F |
| 3DNR | Yes | Dimensions (L) x (Φ) | 263 x 93mm / 10.35" x 3.66" |
| Interface | RJ-45 10M/100M adaptive | Weather Resistance | IP66 |
| Supported Protocols | TCP/IP, UDP, HTTP, DHCP, RTSP, DDNS, NTP, PPPOE, UPNP, SMTP, ONVIF | Weight | 957g / 2.11lb |
| Reset Button | Yes | Certificates | CE, FCC, RoHS |

*All images presented in this document are for example only. Product models may vary in different countries. Please visit EverFocus regional Websites for detailed ordering information.

*Information contained in this document is subject to change without notice.

Find Out More At:

EverFocus Taiwan HQ:
TEL: +886 2 2698 2334
www.everfocus.com.tw
marketing@everfocus.com.tw

EverFocus USA - California:
TEL: +1 626 844 8888
www.everfocus.com
sales@everfocus.com

International Branch Offices:
Germany, China, Japan

