

## The ENG drama-type lens Fujinon HA22x7.3ERM/ERD



The HA22x7.3 ENG lens is perfect for applications in busy digital production studios and remote productions where uncompromising, high-quality acquisition is required. The HA22x7.3 is a 2/3-inch format wide-angle High Definition lens with the most comprehensive angular field of view in its class.

The HA22x7.3 lens is ideal for equipment rental companies with a demanding clientele that requires pristine images for commercials and high-end dramas. With its



reduced focus breathing, a flexible F-stop range (up to 1.9) and the exclusive Digi Power servo system for fast and accurate zooming, the HA22x7.3 is the perfect complement for TV commercials and remote location documentary work.

With a 7.3–161 mm (1x) and 14.6–322 mm (2x) focal range, this is the longest zoom in its class. Based on Fujinon's GO-Technology for the sharpest pictures, the lens weighs a mere 3.15 kg. This inner focus lens is fitted with a macro and 2x extender as standard. It incorporates Fujinon's Digi Power features such as QuickZoom and others. These features provide a user-friendly lens enabling the camera operator to fully concentrate on the subject.

The HA22x7.3 is designed to meet the needs of the next generation of digital broadcasting. Fujinon. To see more is to know more.

Specifications/Lens		HA22x7.3ERM/ERD	
Zoom ratio		22x	
Extender		2x	
Focal length	w/o extender	7.3–161	
Focal length	w/ extender	14.6–322 mm	
Maximum relative aperture		F1.9 (7.3–113 mm) / F2.7 (161 mm)	
Angular field of view	16:9 Aspect ratio (9.59 x 5.39 mm)	(1x) 7.3 mm: 66°36' x 40°32' (1x) 161 mm: 3°25' x 1°55'	(2x) 14.6 mm: 36°22' x 20°55' (2x) 322 mm: 1°42' x 0°58'
Minimum Object Distance M.O.D.		0.85 m	
Object dimensions at M.O.D.	16:9 Aspect ratio (9.59 x 5.39 mm)	(1x) 7.3 mm: 1,222 x 687 mm (1x) 161 mm: 55 x 31 mm	(2x) 14.6 mm: 609 x 342 mm (2x) 322 mm: 28 x 16 mm
Dimensions		Ø 110 x 287.3 mm	
Macro		Yes	
Filter thread		M127 x 0.75 (Filter attaches to lens hood)	
Weight (without lens hood)		3.15 kg / 3.22 kg	
Operating system		RM / RD	
Features <sup>2</sup>		IF QZ ZL*	
Options <sup>2</sup>		QF Vformat VC	

\*Controlled by Digital zoom demand <sup>2</sup> 2nd page: legend for logos

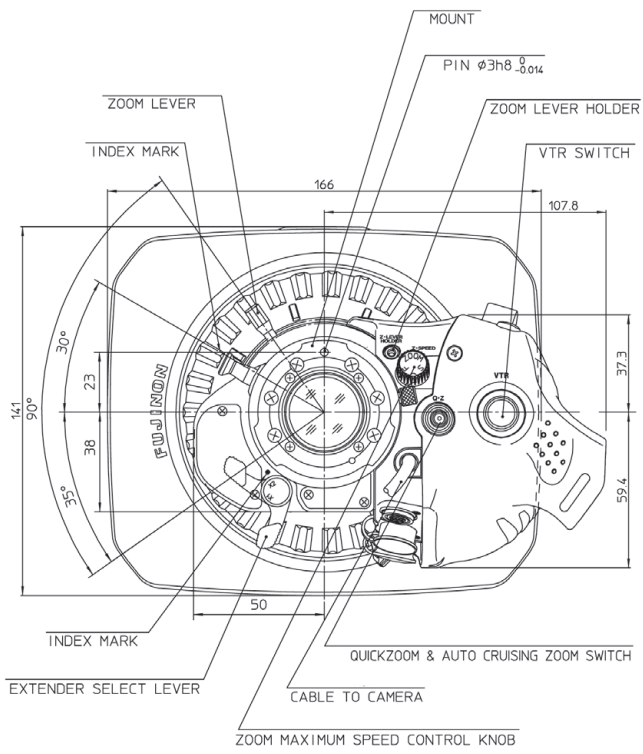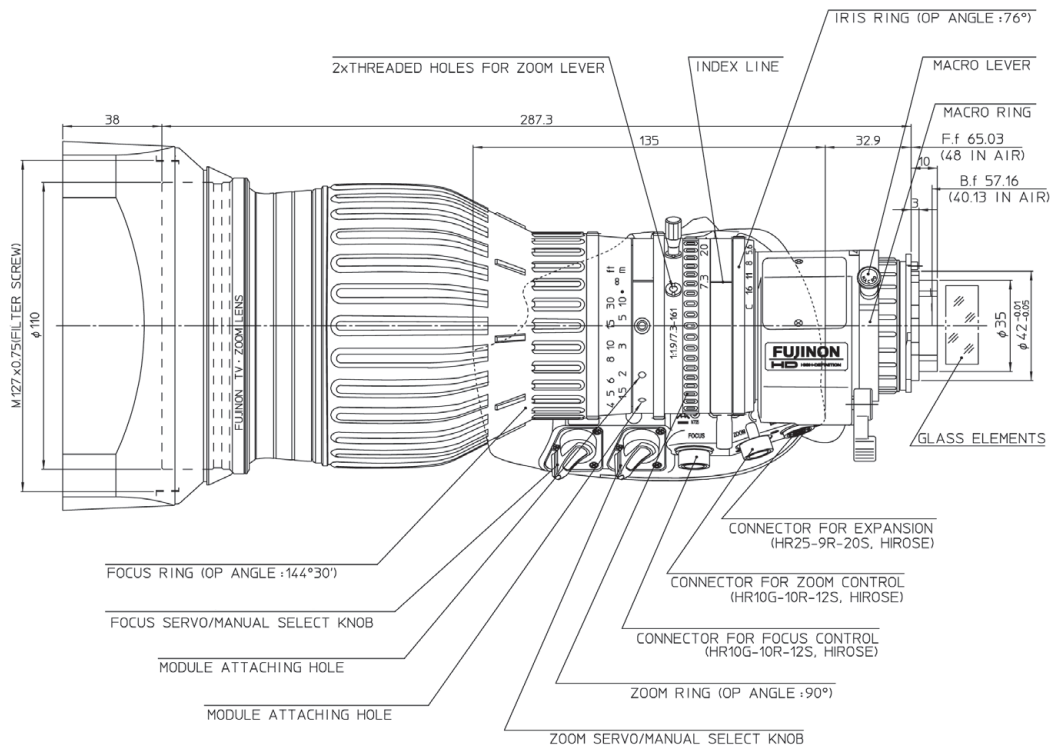

### Accessories HA22x7.3

Filters	
▶ EFL-127 UV	UV
▶ EFL-127 SL	Skylight
▶ EFL-127 N2	Neutral density 2
▶ EFL-127 N4	Neutral density 4
▶ EFL-127 N8	Neutral density 8
▶ EFL-127 CS	Cross screen
▶ EFL-127 SN	Snow cross
▶ EFL-127 SU	Sunny cross
▶ EFL-127 SF	Soft focus
▶ EFL-127 PL	Polarizing
▶ TCV-H110	Tele converter (1.5x)

Annotations: For more detailed information and for additional accessories, please refer to the general catalogue.

- IF** Inner Focus
- QF** QuickFrame
- QZ** QuickZoom
- VC** Virtual Connector
- Vformat** Variable Format
- ZL** Zoom Limit



**FUJIFILM Europe GmbH**

Heesenstr. 31, 40549 Düsseldorf, Germany  
 Tel.: +49 211-50 89 0, Fax: +49 211-50 89 344  
 www.fujifilm.eu

Specifications are subject to change without notice. 01/12