


SD/HD/3G-SDI Multi-Format Monitors / Sunlight Readable Monitors

LVM-095W-N / SRM-095W



Main body Dimensions

- Main Body : 223 x 175 x 60 (mm) / 8.78 x 6.89 x 2.36 (inch)
- With stand : 260 x 194.2 x 90 (mm) / 10.24 x 7.65 x 3.54 (inch)
- Weight : 2.1Kg / 4.63lbs

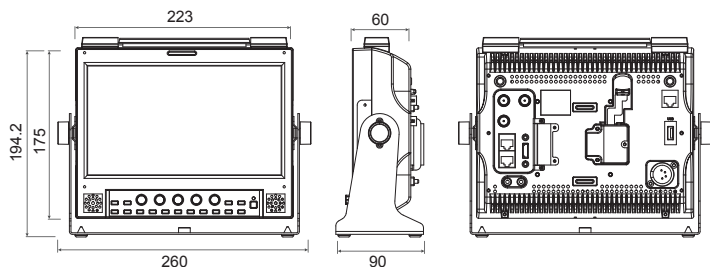

LCD


	LVM-095W-N	SRM-095W
Size	9"	9"
Resolution	1920 x 1080 (16 : 9)	1920 x 1080 (16 : 9)
Pixel Pitch	0.1035mm	0.1035mm
Color Depth	16.7M	16.7M
Viewing Angle (Typ.)	176°(H) / 176°(V)	176°(H) / 176°(V)
Luminance (Max.)	400cd/m ² (center) /	800cd/m ²
Contrast Ratio	750:1	800:1
Display Area	198(H) x 111(V) mm	198(H) x 111(V) mm

9" FHD Multi-purpose Monitor

The LVM-095W-N / SRM-095W, the new 9" released from TVLogic displays full HD resolution of 1920x1080. It also corresponds with a wide range of image sources (3G HD/ SD-SDI, HDMI) and provides a wide viewing angle (176 degrees).

For maximized efficiency and economic feasibility, LVM-095W-N / SRM-095W is constructed from aluminum for an extra-light body weight and a holds a built-in V-Mount.

Upgraded with new FHD panel with accurate color reproduction capability that exactly meets the HDTV standards, LVM-095W-N / SRM-095W gives super clear picture quality with powerful features.

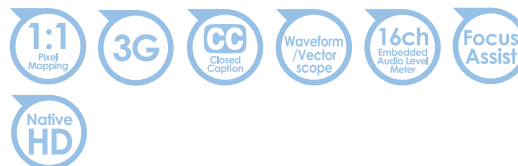

Product Highlights

- 9" 1920 x 1080 (16:9) Resolution
- 3G-SDI Level A/B
- Audio Level Meter Display
- Blue Only
- Focus Assist
- H/V Delay
- H/V Flip
- Key lock
- Luma(Y') Zone Check
- Marker
- Mono
- Range Error
- Temperature Adaptive Color
- Time Code Display
- UMD
- User Aspect
- Various Scan modes
- Waveform/Vectorscope
- Zoom
- CC-608 ANC
- CC-608 LINE 21
- CC-708

Input

2 x BNC	SDI A/B Channel Input
1 x HDMI	HDMI 1 Input

Output

1 x BNC	SDI A/B Selected Channel Output (HDMI-to-SDI)
---------	---

Input Signal

Analog	CVBS (SDI b port select)
3G-SDI	2.970Gbps
HD-SDI	1.485Gbps
SD-SDI	270Mbps
HDMI (PC & HDMI mode)	1080p (23.98/24/25/30/50/59.94/60)/1080i(50/59.94/60)/720p(50/60) 480i(60)/480p(60)/576i(50)/576p(50) 640x480/720x400/800x600/1024x768/1280x768/1280x1024/1366x768

Analog Input Spec

CVBS	1.0Vp-p (With Sync) NTSC. PAL
------	-------------------------------

SDI Input Signal Formats

SMPTE-425M-A/B	1080p (60/59.94/50/30/29.97/25/24/23.98/30sF / 29.97sF/25sF/24sF/23.98sF)
SMPTE-274M	1080i (60 / 59.94 / 50) 1080p (30/29.97/25/24/24sF/23.98/23.98sF)
SMPTE-296M	720p (60/59.94/50)
SMPTE-260M	1035i (60/59.94)
SMPTE-125M	480i (59.94)
ITU-R BT.656	576i (50)
2K Format	2048 x 1080p (24/24sF/23.98/23.98sF)
Audio IN	Embedded Audio / Analog stereo (Phone Jack)
Audio OUT	Analog stereo (Phone Jack) / Internal Speaker (Mixed Mono)
Power	DC 12/24V
Power Consumption (Approx.)	DC 24 Watts (Max 2A)
Operating Temperature	0°C to 45°C (32°F to 113°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Accessory	AC Power Cord / DC Power Adaptor / Camera Mount Support / Handle / Stand

* Specifications may be changed without notice.

Optional Accessories



Multi Format

TVLogic Zubehör

Series	Model	VIDEOR Teilnr.	Product Description
LVM-095W LVM-095W-N SRM-095W	RMK-095-D	208533	Rack Mount Kit for Dual Monitors for LVM-095W(-N) / SRM-095W
	RMK-095-S	208532	Rack Mount Kit for Single Monitor for LVM-095W(-N) / SRM-095W
	OPT-AF-095W	212917	External Acrylic filter for 095W(-N) / SRM-095W
	BH	205028	Ball Head for LVM-071W, 074W, 084, 091W-M, 091W-3G, 095W(-N) / SRM-074W(-N), 095W / LQM-071W
	CBH-095	212889	Carrying Bag with Hood for 095W(-N) / SRM-095W
	HDMI BKT-095	208541	HDMI Bracket for LVM-095W(-N) / SRM-095W
	TH-Mount 09	210221	Camera Mount for LVM-091W, 091W-M, 091W-3G, 095W(-N) / SRM-095W
	HOOD-095	208539	Sun Hood for LVM-095W(-N) / SRM-095W
Calibration Probe	W-Rite, i1 Display Pro	211340	Basic Color Calibration Utility ==> comes with CL-Soft for free
	Klein K-10A	211339	Basic Color Calibration Utility ==> comes with CL-Soft for free
	CL-Soft	84251	FREE Color Calibration S/W & License Key for EYE-ONE & Klein K-10 probes. (Software Only)