

## PM-55



LED 

A 55" LED-backlit display featured with Anti-Burn-in™ technology, USB playback and DLNA compliance function, tailored for professional indoor digital signage applications.

Featuring a LED-backlit IPS panel, the PM-55 offers more than just full HD 1920 x 1080 resolution. Consistent and accurate colour is discernible from all viewing angles. The RS-232/RJ45/IR remote control function makes it convenient for operating multiple displays directly from a PC. Coupled with the built-in scheduler, the PM-55 can be switched on and off automatically at pre-set time. USB playback and DLNA compliance support maximise flexibility for various digital contents sharing, content includes music, movies, and photos. With Anti-Burn-in™ technology, Built-in Image Enhancer and built-in speakers, the PM-55 is ideal for performing in professional digital signage settings.

- > LED-Backlit technology with Full HD resolution
- > IPS panel for wide viewing angle
- > 12.6 mm (left/right/top) and 14.5 mm (bottom) slim bezel width
- > Anti-Burn-in™ technology
- > Built-in Image Enhancer: 3D Comb Filter/ Deinterlace/ Noise Reduction
- > USB playback function
- > DLNA compliance
- > Versatile connectivity: VGA, DVI, HDMI, Composite, Component
- > RS-232 in/out, RJ45 and IR in/out for remote control
- > Built-in scheduler allows different programme scheduling
- > Built-in speakers (10W x 2)




# PM-55

## Specifications

## PM-55

<b>Panel</b>	Panel Type	LED-Backlit TFT LCD (IPS panel)
	Panel Size	54.64"
	Max. Resolution	1920 x 1080
	Brightness	350 cd/m <sup>2</sup> (Typical)
	Contrast Ratio	1,200 : 1 (Typical)
	Viewing Angle (H/V)	178°/178°
	Display Colour Response Time	16.7M 5ms (GTG)
<b>Frequency (H/V)</b>	H.Freq	31 kHz – 92 kHz
	V.Freq	48 Hz – 85 Hz
<b>Input</b>	VGA	15-Pin D-Sub
	DVI	24-Pin DVI-D
	HDMI	HDMI
	Component	RCA x 3
	CVBS	RCA (share with Component -Y)
<b>External Control</b>	RS-232 in/out	2.5mm jack
	LAN	RJ45
	IR in/out	3.5 mm phone Jack
<b>Audio</b>	Audio In	1 x stereo audio in for PC (audio jack, 3.5 Ø) 1 x Stereo audio in (RCA)
	Audio Out	1 x Stereo audio out (RCA)
	Internal Speaker	10W x 2
<b>Other Connectivity</b>	USB Port	USB 2.0
<b>Power</b>	Power Supply	Internal
	Power Requirements	100 - 240V, 50 - 60Hz
	Consumption	< 179 W (On) < 0.5 W (Active off/Off)
<b>Operating Conditions</b>	Temperature	0°C ~ 40°C (41°F~104°F)
	Humidity	20%~80% (No condensation)
<b>Storage Conditions</b>	Temperature	-20°C ~ 60°C (-4°F~140°F)
	Humidity	15%~95% (No condensation)
<b>Mounting</b>	VESA FPM PMI	Yes (400 x 400 mm & 400 x 200 mm)
<b>Dimensions</b>	w/o base (W x H x D)	1239 x 711 x 60 mm (48.8" x 28.0" x 2.4")
	Packaging (W x H x D)	1365 x 864 x 185 mm (53.7" x 34" x 7.3")
<b>Weight</b>	w/o base	16 kg (35.3 lbs)
	Packaging	23 kg (50.7 lbs)
<b>Regulation Approval</b>	Certifications & Compliance	CB, CE, FCC, WEEE, RoHS, REACH
<b>Accessories</b>	Supplied	User manual, Remote control, Power cord, 15-Pin D-Sub cable, RS232 cable

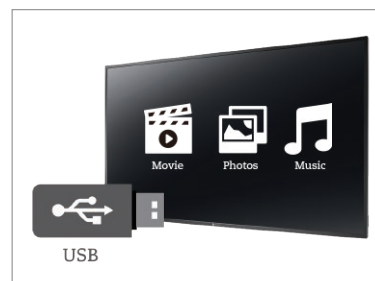

USB Playback for easy multimedia content presenting



Versatile connectivity: VGA, DVI, HDMI, Composite, Component



Built-in scheduler automatically activates and deactivates the PM-55 with designated input signal according to programmed schedules



RS-232/ RJ45/IR for remote control

