

## LE-24



Incorporated with advanced OptiCom™ Technology, the LE-24 FHD display sitting on a height adjustable stand fits perfectly for home and office applications.

AG Neovo's advanced OptiCom™ Technology eliminates emission of harmful blue light and bothersome flicker to reduce eye fatigue and dryness when viewing the display constantly. The 24" LE-24 also features an IPS panel with full HD resolution and 20,000,000:1 contrast ratio for superior picture clarity and colour performance. Sitting firmly on a height adjustable stand, users are able to tilt, pivot, swivel and adjust the screen's height for optimized viewing comfort. All this and more make the LE-24 ideal for home and office multimedia applications.

- > 24" widescreen LED display
- > LED-backlit technology with high FHD 1920 x 1080 resolution
- > Advanced OptiCom™ Technology: Anti-blue light and flicker free technologies for eye protection and viewing comfort
- > IPS panel provides consistent and accurate colour from all viewing angles
- > Slim housing design and widescreen format
- > Excellent clarity with ultrahigh 20,000,000:1 dynamic contrast ratio
- > Superior colour performance and colour contrast
- > HDMI input for Full HD connectivity with multimedia devices
- > Built-in speakers (2W x 2)
- > Height adjustable stand: tilt, pivot, swivel, height adjustable for multiple viewing options
- > Energy efficiency
- > VESA mount standard



OptiCom™ Technology- Anti-blue light and flicker free technologies for eye protection and viewing comfort

# LE-24

## Specifications

## LE-24

<b>Panel</b>	Panel Type	LED-Backlit TFT LCD (IPS Panel)
	Panel Size	23.6"
	Max. Resolution	FHD 1920 x 1080
	Pixel Pitch	0.272 x 0.272
	Brightness	250cd/m <sup>2</sup> (Typical)
	Contrast Ratio	20,000,000:1 (DCR)
	Surface Treatments	Hard Coating (3H) Anti-glare treatment
	Viewing Angle (H/V)	178°/178°
	Display Colour	16.7M
	Response Time	7ms (GTG)
<b>Frequency (H/V)</b>	H.Freq	30kHz – 83kHz
	V.Freq	56Hz – 76Hz
<b>Input</b>	VGA	15-Pin D-Sub
	DVI	24-Pin DVI
	HDMI	HDMI
<b>Audio</b>	Audio In	1 x stereo audio in for PC (audio jack, 3.5 Ø)
	Speaker	2W x 2
<b>Power</b>	Power Supply	Internal
	Power Requirements	100 – 240 V, 50-60 Hz
	Consumption	< 35W (On) < 0.5W (Stand-by) < 0.5W (Off)
<b>Operating Conditions</b>	Temperature	0°C ~ 40°C (32°F ~ 104°F)
	Humidity	10% ~ 85%
<b>Mounting</b>	VESA FPMPMI	Yes (100 x 100mm)
<b>Security</b>	Kensington® Security Socket	Yes
<b>Stand</b>	Tilt Capacity	-5° ~ 22°
	Swivel	±160°
	Pivot Capacity	0° ~ 90°
	Height Adjustment	0 ~ 130 mm
<b>Dimensions</b>	with Base (W x H x D)	571.4 x 554.7 x 244.5 mm (22.5" x 21.8" x 9.6")
	w/o Base (W x H x D)	571.4 x 350.9 x 48.1 mm (22.5" x 13.8" x 1.9")
	Packaging (W x H x D)	694 x 443 x 180 mm (27.3" x 17.4" x 7.1")
<b>Weight</b>	Product Weight (with base)	5.6 kg (12.3 lbs)
	Product Weight (w/o base)	3.3 kg (7.3 lbs)
	Packaging Weight	7.3 kg (16.1 lbs)
<b>Regulation Approval</b>	Certifications & Compliance	CB, CE, RoHs, FCC, BSMI, WEEE
<b>Accessories</b>	Supplied	CD ROM (user manual), warranty card, power cord, 15-Pin D-Sub cable, Audio cable




Advanced OptiCom™ Technology: Anti-blue light and flicker free for a more comfortable viewing experience



Built-in HDMI input makes the LE-24 easy to be paired with Full HD multimedia advices



IPS panel provides superb clarity from all angles

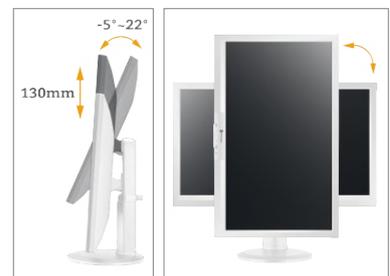

Ergonomically-designed stand allows users to tilt, pivot, swivel and adjust the height to its ideal position

