

DirectIP HDMI Encoder

HE-1101


- Specialised in DirectIP™ NVR
- Ease integration with 3rd party system
- Supports HDMI and VGA input ports
- Supports Mouse and Keyboard control from remote site

SPECIFICATIONS

ENCODER	
Video Compression	H.265, H.264, M-JPEG, Intelligent Codec
Video Input	1 HDMI, 1 VGA
Max. Video Resolution	1920 x 1080
Bitrate	Up to 10MP per Channel
Frame Rate	30ips @ 1920 x 1080
Video Outputs	1 HDMI, 1 VGA, 1 CVBS
Multi Streaming Video	Quadruple Stream
Audio In / Out	1 (3.5mm)
Alarm In / Out	-
Max. Network Throughput	10Mbps
Serial Interface	1 x USB Type B
Network Interface	1 x RJ45 (10 / 100)
IP Camera Protocol	DirectIP™, IDIS Protocol, ONVIF
GENERAL	
Dimensions (W x H x D)	200mm x 44mm x 153mm (7.9" x 1.7" x 6.0")
Weight	0.84kg (1.85lb)
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)
PoE (Class)	Yes (IEEE 802.3af Class 3)
Power Source	12VDC, PoE
Power Consumption	10W
Approvals	FCC, CE, KC



DIMENSIONS

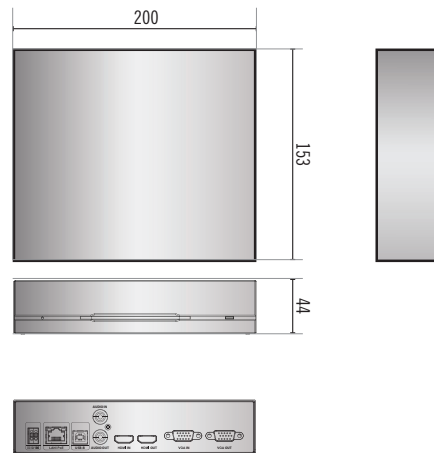

(Unit - mm)

DirectIP 16 Channel Decoder

DD-1116


- Specialized in DirectIP NVR
- Supports DirectIP NVR
- Supports HDMI, VGA, CVBS port
- Up to 4 channel Full HD display
- Up to 16 channel real-time display

SPECIFICATIONS

DECODER	
Video Compression	H.264
Video Input	16ch IP
Supported Devices	DirectIP NVR
Video Outputs	1 HDMI, 1 VGA, 1 CVBS
Display Resolution	HDMI, VGA : 1920 x 1200, 1920 x 1080, 1680 x 1050, 1600 x 1200 CVBS : 640x480
Display Speed	Up to 480ips
Max. Network Throughput	48Mbps
Network Connection	Gigabit Ethernet x 1
GENERAL	
Dimensions (W x H x D)	200mm x 44mm x 153mm (7.9" x 1.7" x 6.0")
Weight	0.84kg (1.85lb)
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)
PoE (Class)	Yes (IEEE 802.3af Class 0)
Power Input	12VDC, PoE
Power Consumption	8W
Approvals	FCC, CE



DIMENSIONS

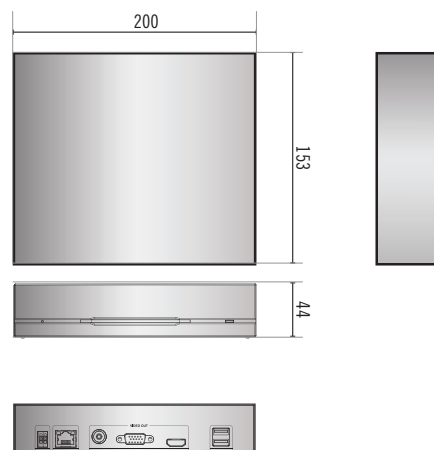

(Unit - mm)