

# HX-32E

LED-backlit Display

Monitor Uncompressed  
High-definition Video  
with Ultra-Low Latency



The HX-32E offers native Full HD resolution with high contrast ratio, wide viewing angles and consistency of picture quality. Its SDI input receives mega-pixel images directly from 3G-SDI devices without signal interruption. The HX-32E is built to survive the rigors of production in studios and surveillance environments, the solid protection of a metal enclosure housing, the NeoV™ Optical Glass and Anti-Burn-in™ technology makes it a fitting choice for a full spectrum of professional applications that require 24/7 nonstop operation.






### Superb Image Quality Guaranteed

Selectable gamma curve visually optimizes different kinds of images. The AG Neovo specialized image settings enhance colour, brightness, sharpness and contrast ratio, allowing the HX-32E to improve the light, shadows and colour balance of videos.

### Automatic SDI Switching

The HX-32E has been designed for broadcast as well as surveillance and includes support for multiple SDI video standards, including SD, HD and 3G-SDI formats. All video formats can be connected and changed at any time. The HX-32E will automatically detect the input signal and switch formats as needed.

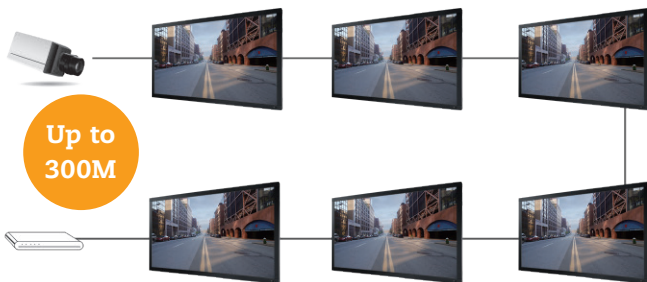

### Easy to Connect

The HX-32E offers a wide variety of inputs for compatibility with the majority of video and data sources. Its high-quality HD-SDI input and loop through HD-SDI output makes it easy to connect other gear without the need for a splitter.

### Industry-leading Reliability

The HX-32E is specially designed to transcend the challenge of enduring 24/7 operations. AG Neovo's Anti-Burn-in™ technology also prevents image ghosting while performing nonstop mission-critical operations. Its metal casing and NeoV™ Optical Glass not only protect the HX-32E from damage but also keep maintenance easy.



### Features

- Full HD 1920 x 1080 resolution
- Supports multiple SDI formats: 3G/HD/SD-SDI
- Embedded audio in SDI up to 8 channels of 48kHz
- Anti-Burn-in™ technology prevents image ghosting
- NeoV™ Optical Glass and metal housing for excellent cleanability and protection
- VA panel technology ensures accurate colours and offers high contrast ratios with wide viewing angles
- Image enhancer: 3D Comb Filter / Deinterlace / Noise Reduction
- Versatile connectivity: 3G SDI, DisplayPort, HDMI, DVI, VGA, Component/Composite
- Built-in USB media player for simple signage content delivery
- An integrated scheduler allows content programming based on time and day
- SDI loop-through output port
- DisplayPort, DVI, VGA, Composite, RS232, IR daisy chain support
- RJ45, RS232, IR device control support
- Native tiling support for easy video wall setup (up to 10 x 10)
- EcoSmart Sensor automatically adjusts brightness level according to ambient lighting conditions
- Selectable gamma curves optimise different kinds of images
- Flexible display orientation: Landscape/Portrait
- Designed and developed for continuous 24/7 operation



## Specifications

### HX-32E

<b>Panel</b>	Panel Type Panel Size Max. Resolution Pixel Pitch Brightness Contrast Ratio Viewing Angle (H/V) Display Colour Response Time	LED-Backlit TFT LCD (VA Technology) 31.5" FHD 1920 x 1080 0.364 mm 500 cd/m <sup>2</sup> 3000:1 178°/178° 16.7M 5 ms
<b>Frequency (H/V)</b>	H Freq. V Freq.	31 kHz-92 kHz 48 Hz-85 Hz
<b>Input</b>	SDI DisplayPort HDMI DVI VGA Component Composite	BNC x 1 1.2 x 1 1.4 x 2 24-Pin DVI-D x 1 15-Pin D-Sub x 1 BNC x 1 BNC x 1 (Share with Component-Y)
<b>Output</b>	SDI DisplayPort VGA/DVI/HDMI Composite	BNC x 1 1.2 x 1 29-Pin DVI-I x 1 BNC x 1
<b>External Control</b>	IR in/out RS232 in/out LAN (RJ45)	3.5 mm Phone Jack 2.5 mm Phone Jack Yes
<b>Other Connectivity</b>	USB	2.0 x 1 (Service Port / Media Playback)
<b>Audio</b>	Audio In  Audio Out Internal Speakers	Stereo Audio Jack (3.5 mm) x 1 Stereo Audio Jack (RCA) x 1 Stereo Audio Jack (3.5 mm) x 1 10W x 2
<b>SDI</b>	3G-SDI (SMPTE 424M) HD-SDI (SMPTE 292M)  SD-SDI (SMPTE 259M)	1080p @50/60fps 720p @25/30/50/60fps, 1080p @24/25/30/50/60fps 1080i @50/60fps 480i @60fps, 576i @50fps
<b>Power</b>	Power Supply Power Requirements On Mode Stand-by Mode Off Mode	Internal 100-240V, 50-60 Hz 65W (On) < 0.5W < 0.5W
<b>NeoV™ Optical Glass</b>	Thickness Reflection Rate Transmission Rate Hardness	4.0 mm (0.16") < 1% > 97% > 9H
<b>Operating Conditions</b>	Temperature Humidity	0°C-40°C (32°F-104°F) 20%-80% (non-condensing)
<b>Storage Conditions</b>	Temperature Humidity	-20°C-60°C (-4°F-140°F) 5%-90% (non-condensing)
<b>Mounting</b>	VESA FPMPMI	Yes (400 x 200 mm)
<b>Dimensions</b>	w/o Base (W x H x D) Packaging (W x H x D)	757.6 x 452.0 x 75.1 mm (29.8" x 17.8" x 3.0") 892.0 x 600.0 x 185.0 mm (35.1" x 23.6" x 7.3")
<b>Weight</b>	w/o Base Packaging weight	15.2 kg (33.4 lb) 17.8 kg (39.2 lb)
<b>Regulation Approval</b>	Certifications & Compliance	FCC, CE, LVD, WEEE, RoHS, REACH
<b>Accessories</b>	Supplied	Power Cord, RS232 Cable, Remote Control, Batteries, RS232 Daisy Chain Cable, Quick Start Guide
<b>Optional Accessories</b>		Floor Mounts: FMS-01, FMS-02, FMC-02 Stand: STD-09 Ceiling Mount (Landscape only): CMP-01 + LMK-02 Wall Mounts (Landscape only): LMA-01, LMK-02

**Global Headquarters**

Taipei, Taiwan

**EMEA Regional Headquarters**

Capelle a/d IJssel, The Netherlands

**North & South America Regional Headquarters**

San Jose, CA, U.S.A.

**Asia-Pacific Regional Headquarters**

Taipei, Taiwan

**Canada Sales Office**

Vancouver, B.C., Canada

**China Sales Office**

Shanghai, China

**Czech Republic Sales Office**

Brno, Czech Republic

**Denmark Sales Office**

Støvring, Denmark

**Germany Sales Office**

Mechernich, Germany

**Italy Sales Office**

Livorno, Italy

**Poland Sales Office**

Warsaw, Poland

**Spain Sales Office**

Barcelona, Spain

**Ukraine Sales Office**

Lviv, Ukraine

[www.agneovo.com](http://www.agneovo.com)