

# DS-1331HZ-B


**Outdoor Housing** 



#### Feature

- New side-cover design for convenient installation and maintenance
- Stainless steel dual-hasp design, protection level up to IP66
- Polycarbonate glass with tempered glass screen protector for lens protection
- Built-in fan for keeping the camera working stably
- Polycarbonate window for IK10 protection

## **Dimension and Wiring**

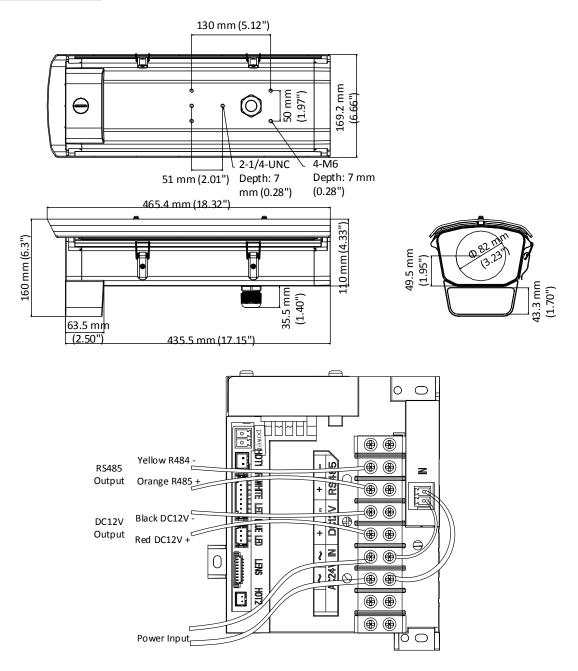



# Available Model

DS-1331HZ-B

#### Parameter

Model	DS-1331HZ-B
Parameters	Outdoor Housing
Product Feature	Built-in fan for use in high temperature environments
Working Temperature	-20° C to 60° C (-4° F to 140° F)
Temperature Control	No heater. Fan normally open.
Power Supply	Not included. 12 VDC, 2A is recommended.
Power Consumption	Fan: 4 W
Ingress Protection	IP66
Material	Main body: Aluminum alloy; Window: Polycarbonate glass and tempered glass screen protector
Dimension	465.4 mm × 169.2 mm × 160 mm (18.32" × 6.66" × 6.30")
Weight	Approx. 2000 g (4.41 lb.)

# Accessory





DS-1233ZJ Column Mount



### Note

- The outdoor housing should be installed on a flat surface.
- Waterproof rubber is necessary for the outdoor application.
- The wall should be capable of supporting at least 3 times as much as the total weight of the camera, the outdoor housing and other accessories.