



For Security
Vari-Focal

MP^{MEGA PIXELS}

YV4.3×2.8SA-2

Applicable camera (model)

1	2/3	1/2	1/3	1/4
---	-----	-----	-----	-----

VARI
Vari-Focal

WIDE
Wide Angle

TELE
Telephoto Long Focal

3 Mega
For Megapixel Camera

MANUAL
Manual Iris

CS-mt
CS Mount


METAL
Metal Mount

AT
Aspherical Lens

F1.4
Wide Aperture Rate

RoHS
RoHS Compliant


4.3×

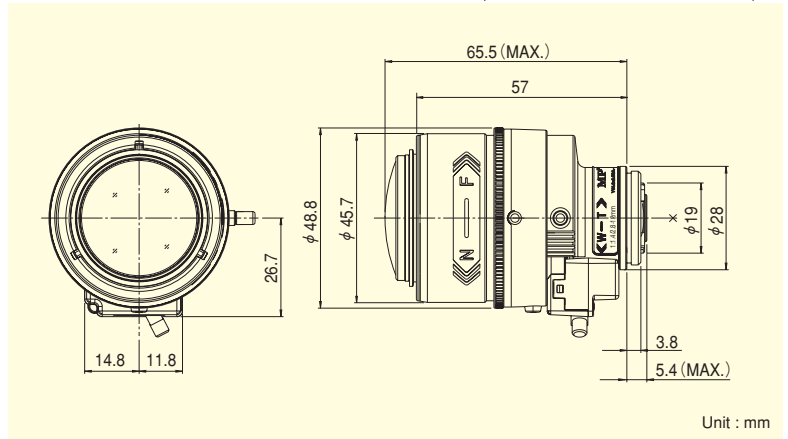

- High image-quality monitoring with optical performance supporting 3 megapixels.
- Wide f2.8-12mm range accommodates various applications
- Designed to maximize optical performance with high-accuracy aspheric lens, low-dispersion glass, and high refractive-index glass.

Focal Length (mm)		2.8~12 (4.3×)	
Iris Range		F1.4 ~ Close	
Operation	Zoom	Manual	
	Focus	Manual	
	Iris	Manual	
Angle Of View (H×V)	1/3"	WIDE	100°02' × 74°03'
		TELE	23°26' × 17°36'
	1/4"	WIDE	74°03' × 55°06'
		TELE	17°36' × 13°13'
Angle Of View (H×V) Aspect Ratio 16:9	1/3"	WIDE	109°33' × 60°80'
		TELE	25°31' × 14°23'
	1/4"	WIDE	80°56' × 44°51'
		TELE	19°10' × 10°48'
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.3	
Object Dimensions at M.O.D. (H×V) (mm)	1/3"	WIDE	753 × 476
		TELE	131 × 98
	1/4"	WIDE	476 × 329
		TELE	98 × 73
Object Dimensions at M.O.D. (H×V) (mm) Aspect Ratio 16:9	1/3"	WIDE	895 × 365
		TELE	143 × 80
	1/4"	WIDE	538 × 260
		TELE	106 × 60
Back Focal Distance (in air) (mm)		7.83	
Exit Pupil Position (From Image Plane) (mm)		455	
Filter Thread (mm)		—	
Mount		CS	
Mass (g)		80	
Remarks		• With Metal Mount	

[Lens Image]

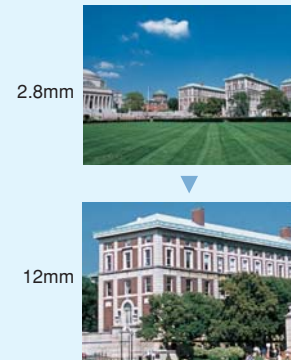

MP
MEGAPIXEL VARI-FOCAL LENSES