


# Viewfinder LCD Monitors


## VFM-056WP

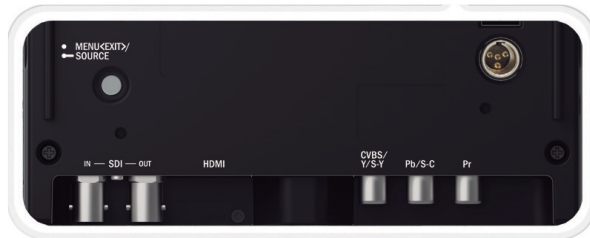

### Main body Dimensions

- Main Body : 156 x 103 x 26.5 (mm) / 6.14 x 4.06 x 1.04 (inch)

- Weight : 0.3kg / 0.66lbs

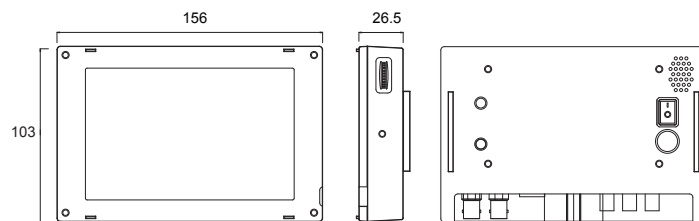

### LCD

Size	5.6"
Resolution	1280 x 800 (16 : 10)
Pixel Pitch	0.0945mm
Color Depth	16.7M
Viewing Angle (Typ.)	170°(H) / 170°(V)
Luminance (Max.)	300cd/m <sup>2</sup> (center)
Contrast Ratio	500:1
Display Area	121(H) x 76(V) mm

### 5.6" Light Weight Compact Viewfinder

The VFM-056WP is available in two configurations and is ideal for HD-SLR production. A 6"x 4"x 1" lightweight magnesium-alloy case houses a 5.6" 1280x800 LED backlit LCD display with a full complement of preferred features including DSLR Scale, Focus Assist, Various Scan Modes, Markers, Audio Level Meter with speaker, Timecode Display, HDMI loop out via HD-SDI (720p), Waveform/Vectorscope, Y Level Check and Range Error Check.



### Product Highlights

- 5.6" 1280x800 (16:10) Resolution
- Magnesium Housing + Light Weight
- 3G-SDI Level A/B
- Audio Level Meter Display
- Blue Only
- Focus Assist
- H/V Delay
- Luma(Y) Zone Check
- Marker
- Max Brightness On / Off
- Mono
- Range Error
- Temperature Adaptive Color
- Time Code Display
- User Aspect
- Various Scan modes
- Waveform/Vectorscope
- Zoom

Input	
3 x RCA	Analog Video Input
1 x BNC	SDI Channel Input
1 x HDMI	HDMI(1.2Ver) Input

Output	
1x BNC	HDMI-to-SDI conversion output

Input Signal	
Analog	CVBS / S-Video / Component Video
3G-SDI	2.970Gb/s
HD-SDI	1.485Gbps
SD-SDI	270Mbps
HDMI	1080p (24/25/30/50/60)/1080i(50/60)/720p (50/60)/480i(60)/480p(60)/576i(50)/576p(50) & VESA/IBM Modes

Analog Input Spec	
CVBS	1.0Vp-p (With Sync) NTSC. PAL
S-Video	1.0Vp-p (Y With Sync), 0.286/0.300 Vp-p(Chroma)
Component Video	1.0Vp-p (Y With Sync), ±350mV (Pb,Pr)

SDI Input Signal Formats	
SMPTE-425M-A/B	1080p(60/59.94/50/30/29.97/25/24/23.98/30sF/29.97sF/25sF/24sF/23.98sF) / 1080i (60/59.94/50)
SMPTE-274M	1080i (60/59.94/50) 1080p (30/29.97/25/24/24sF/23.98/23.98sF)
SMPTE-296M	720p (60/59.94/50)
SMPTE-260M	1035i (60/59.94)
SMPTE-125M	480i (59.94)
ITU-R BT.656	576i (50)

Audio In	Embedded Audio
Audio Out	Analog Stereo (Phone Jack) / Internal Speaker (Mixed Mono)
Power	DC 12V/3A (Max 6.0A)
Power Consumption (Approx.)	8.4Watts(Typ.)
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Accessory	AC Power Cord / DC Power Adaptor / BNC Connector / Camera Mount Support

\* Specifications may be changed without notice.

### Optional Accessories



**TVLogic Zubehör**

Series	Model	VIDEOR Teilnr.	Product Description
VFM-056WP	BH-056	84842	Ball Head for VFM-056W/WP
	TH-Mount 05	210219	Camera Mount for VFM-056WP, 058W
	BB-056S	84834	Battery Bracket for VFM-056WP (Sony NP-F770/F970)
	BB-056C	84835	Battery Bracket for VFM-056WP (Canon BP Series)
	BB-056P	84836	Battery Bracket for VFM-056WP (Panasonic Series)
	BB-056AA	84849	Battery Bracket for VFM-056WP (AA Battery)
	BB-056U	200480	Battery Bracket for VFM-056WP (Sony BP-U30/U60)
	BB-056E	200059	Battery Bracket for VFM-056WP (Canon 5D/5D Battery)
	BB-056B	200479	Battery Bracket for VFM-056WP (Panasonic AF-100)
	V-Mount-056	84852	Battery Adapter for VFM-056WP
	D-Tap-S Cable	210212	D-Tap Adapter for VFM-056WP, 058W & LVM-074 / SRM-074W(-N) (short - 17" length)
	D-Tap-L Cable	210213	D-Tap Adapter for VFM-056WP, 058W & LVM-074W / SRM-074W(-N) (Long - 29" length)
	OPT-AF-056W	84838	External Acrylic filter for VFM-056WP
	HDMI BKT-056	210222	HDMI Bracket for VFM-056WP
	Hood-056	84837	Sun Hood for VFM-056WP
CC-056	84839	Aluminum Carrying Case for VFM-056WP	
Calibration Probe	W-Rite, i1 Display Pro	211340	Basic Color Calibration Utility ==> comes with CL-Soft for free
	Klein K-10A	211339	Basic Color Calibration Utility ==> comes with CL-Soft for free
	CL-Soft	84251	FREE Color Calibration S/W & License Key for EYE-ONE & Klein K-10 probes. (Software Only)