

# Vari-Focal

## YV2.8x2.8LA-SA2

2.8 x

Applicable camera (model) 1 2/3 1/2 1/3 1/4



Vari-Focal Wide Angle DC Auto Iris CS Mount Metal Mount ND Filter Long Cable Aspherical Lens Large Aperture Ratio RoHS Compliant  
**VARI WIDE DC CS-mt METAL ND 230 AT F0.95 RoHS**

## YV10x5B-SA2

10 x

Applicable camera (model) 1 2/3 1/2 1/3 1/4




Vari-Focal Wide Angle Telephoto Long Focal DC Auto Iris CS Mount Metal Mount ND Filter Long Cable Aspherical Lens Large Aperture Ratio RoHS Compliant  
**VARI WIDE TELE DC CS-mt METAL ND 230 AT F1.3 RoHS**

## DV10x7B-SA2

10 x

Applicable camera (model) 1 2/3 1/2 1/3 1/4

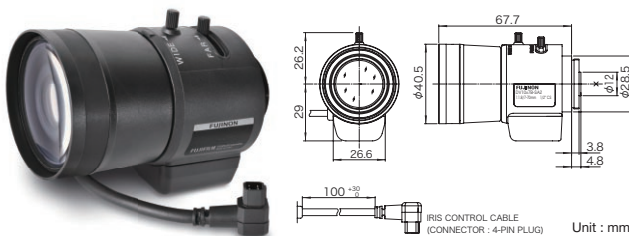

※ To be discontinued when stock runs out.

Vari-Focal Wide Angle Telephoto Long Focal DC Auto Iris CS Mount Metal Mount ND Filter Long Cable Aspherical Lens RoHS Compliant  
**VARI WIDE TELE DC CS-mt METAL ND 230 AT RoHS**

	Applicable to 1/3	Applicable to 1/3	Applicable to 1/2
	YV2.8x2.8LA-SA2	YV10x5B-SA2	DV10x7B-SA2
Focal Length (mm)	2.8 - 8(2.8x)	5 - 50(10x)	7 - 70(10x)
Iris Range	F0.95 - T360(Equivalent to F360)	F1.3 - T360(Equivalent to F360)	F1.8 - T360(Equivalent to F360)
Operation	Zoom	Manual	
	Focus	Manual	
		Auto (DC type)*1	
Angle of View (H x V)	1/2"	WIDE	50° 01' x 38° 12'
		TELE	5° 12' x 3° 59'
	1/3"	WIDE	38° 12' x 28° 56'
		TELE	3° 59' x 3° 02'
1/4"	WIDE	28° 56' x 21° 49'	
	TELE	3° 02' x 2° 17'	
Focus Range (From the Lens Front) (m)		∞ - 0.3	
Mass (g)	45		100

\* 1: The iris automatically closes when the camera is turned off.

※ Each of the above products is also available in long cable type (230 mm).

※ Each of the above products is also available in manual type.