



## 2 Port 95W per Port Power over Ethernet Midspan Mega PoE Midspan



### Features

- Fully Compliant Detection, Disconnect and Voltage Control IEEE802.3af
- Proprietary Detection, Disconnect and Overload Protection
- Full Protection OCP, OVP
- Kit available for mounting in a 19" Rack
- Limited Power Source
- Gigabit Compatible
- Diagnostic LEDs
- SNMP Management
- Full Power at 95W per port
- 1 Year Warranty

### Applications

- LCD Displays
- Wireless Access Points
- Emergency Lights
- Magnetic Locks
- Computer Stations
- Kiosks
- Outdoor Security Cameras
- Medical Monitoring

### Safety Approvals

- cUL/UL
- CE

### Mechanical Characteristics

- Length: 224.9mm (8.85in)
- Width: 200mm (7.87in)
- Height: 48.5 mm (1.91in)
- Weight: 1.59Kg (3.5lbs)

### Output Specifications

Model	Number of Ports
POE240U-2MPN	2

Optional 19" Rack mounting adapter to mount 1 POE240U or 2 side by side; order P/N POE125U-ACCY01

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at [www.phihong.com](http://www.phihong.com) for the most up-to-date specifications and contact information.

**INPUT:**

**AC Input Voltage Range**

90 to 264VAC

**Input Frequency**

47-63Hz

**Input Current:**

5A (RMS) maximum for 90VAC

2.5A (RMS) maximum for 230VAC

**Leakage Current:**

3.5mA maximum at 254VAC 60Hz

**AC Inrush Current:**

30A (RMS) maximum for 115VAC

60A (RMS) maximum for 230VAC

**OUTPUT:**

**Total Output Power**

95W per port at 56V+1/-2

**Ripple and Regulation**

250mV maximum

**Efficiency**

75% (typical) at maximum load, and 120VAC 60Hz

**Hold-up Time**

10mS min. 120VAC and maximum load

**Transient O/P Voltage Protection**

60V maximum at switch on and off at any AC line Phase

**Turn-On Delay Time**

20 sec maximum at maximum load, and 120VAC 60Hz, 25Hz

**ENVIRONMENTAL:**

**Temperature**

Operation 0 to +40°C

Non-operation -25 to +65°C

**Humidity**

Operation 5 to 90%

**Isolation Test**

Primary to Secondary: 4242VDC for 1 minute

Primary to Ground: 2121VDC for 1 minute

Secondary to Ground: 2121VDC for 1 minute

**EMC**

EN55022 Radiate Class A

EN55022 Conducted Class B

**Insulation Resistance**

Primary to Secondary: >10M OHM 500VDC

Primary to Field Ground: >10M OHM 500VDC

**Immunity EN50082-1**

ESD: EN61000-4-2. Level 3

RS: EN61000-4-3. Level 2

EFT: EN61000-4-4. Level 2

Surge: EN61000-4-5. Level 3

CS: EN61000-4-6. Level 2

Voltage Dips EN61000-4-11

Harmonic: EN61000-3-2 Class A

**IEEE 802.3af Interoperability**

If 25kohm is detected the unit operates in "IEEE802.3at mode" 33.6W 2 pair powering. 12.5k detection resistance required for full power

UNH Interoperability report available on request

**FEATURE:**

**Cisco Legacy detection**

No extern parts required for Legacy devices:

VoIP Phones:

7910, 7912, 7940, 7960

Access Points:

350, 1100, 1200

**Over Voltage/Current, Short Circuit Protection**

Outputs equipped with short circuit protection and overload protection as per 802.3af specifications except for maximum average current is 1.69A

The output can be shorted permanently without damage

**Over Temperature Protection**

Automatic Shutdown without damage

**Indicators**


Green LED: Power detected "CONNECT" at 95W

Flashing GREEN: IEEE802.3at detected "CONNECT" at 30W

Yellow LED: Fault detected

**Input Connector**

AC Input IEC320 3 pin

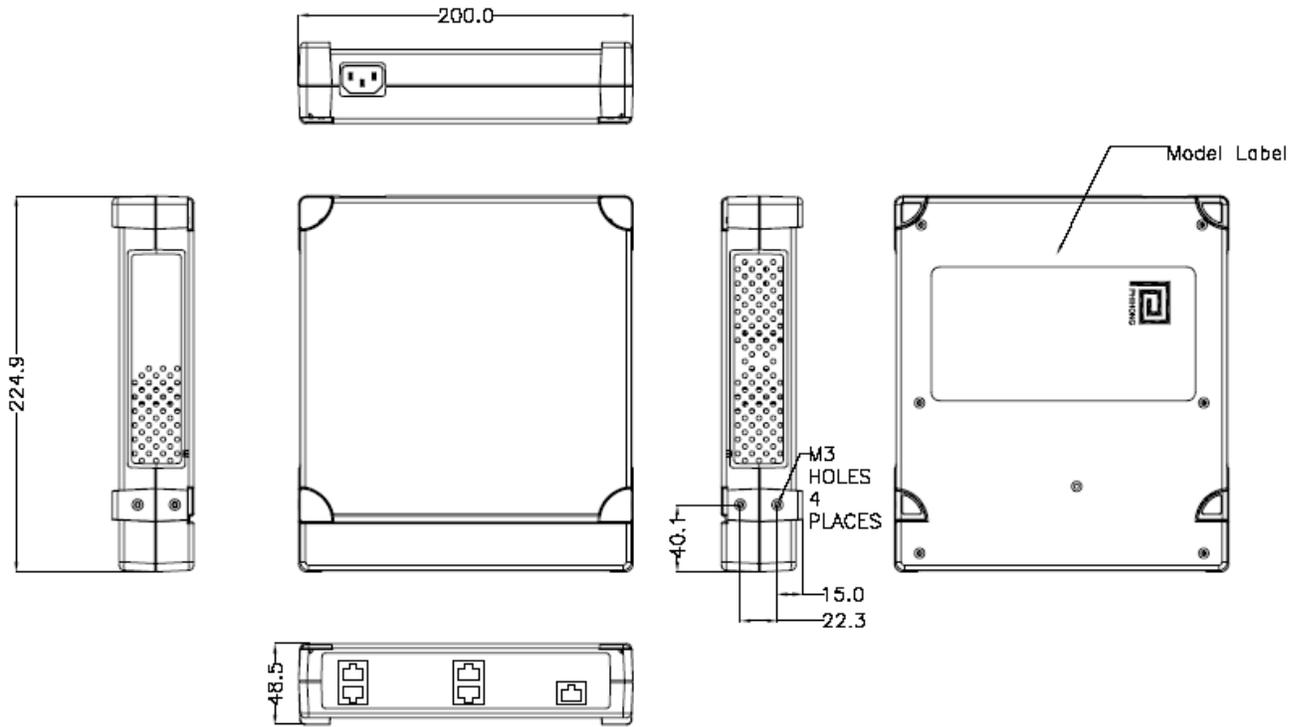

**Façade Display Showing Optional Rack Mounting**

