

X-17P



A brilliant display that delivers advanced design, durability and versatile performance for progressive professional environments.

The X-17P is a highly durable 17" display that will deliver decades of performance. Featuring NeoV™ Optical Glass, built-in video support and multiple input options, the X-17P is well suited to professional public environments. The strong metal casing and VESA compatible wall mounts allows the X-17P to be mounted just about anywhere. The unique look and versatility of the X-17P make it the perfect display solution for any modern environment.

- > NeoV™ Optical Glass
- > AIP technology: PIP; Built-in Image Enhancer
- > Swift 3 ms response time
- > S-Video and CVBS inputs
- > DVI video inputs for high quality signal
- > Built-in speakers (1.5W x 2)
- > EcoSmart Sensor for low watt power consumption
- > Touch sensor control keys to prevent vandalism
- > Auto-adjustment for optimal settings
- > Kensington® security socket
- > VESA standard wall mount
- > Durable metal casing
- > Available colours: black, white



NeoV™ Optical Glass - The most trusted hard glass protection available. Only on AG Neovo displays



X-17P

Specifications

X-17P

Panel	Panel Type Panel Size Max. Resolution Pixel Pitch Brightness Contrast Ratio Viewing Angle (H/V) Display Colour Response Time	TFT LCD 17.0" (432 mm) SXGA 1280 x 1024 0.264 mm 250 cd/m ² (Typical) 1000:1 (Typical) 170°/160° (Typical) 16.7M 3 ms (GTG)
Frequency (H/V)		H: 24 kHz - 82 kHz V: 50 Hz - 85 Hz
Input	Analogue Digital S-Video CVBS	15-Pin D-Sub 24-Pin DVI-D 4-Pin Mini DIN RCA
Audio	Audio In Audio Out Speaker	1 x stereo audio in for PC (audio jack, 3.5 Ø) 1 x stereo audio in for CVBS or S-Video (RCA) 1.5W x 2
Power	AC-DC Adaptor Power Consumption	External DC 12V AC 100 - 240 V, 50 - 60 Hz < 19 W (on) < 0.5 W (Stand-by) < 0.5 W (Off)
NeoV™ Optical Glass	Thickness Reflection Rate Transmission Rate Coating Hardness	3.0 mm (0.12") < 1% > 96% > 9H
Plug & Play	VESA	DCC 2B, DCC/CI
Operating Conditions	Temperature Humidity	0 °C ~ 40 °C 10% ~ 90%
Storage Conditions	Temperature Humidity	-20 °C ~ 60 °C 5% ~ 95%
Mounting	VESA FPMPMI	Yes (100 mm & 75mm)
Tilt	Tilt	0° ~ +20°
Dimensions	Product (W x H x D) Packaging (W x H x D)	409 x 398 x 175 mm (16.1" x 15.7" x 6.9") 486 x 497 x 228 mm (19.1" x 19.6" x 9.0")
Weight	Product Weight Packaged Product Weight	6.6 kg (14.5 lbs) 7.6 kg (16.7 lbs)
Regulation Approval	Certifications & Compliance	CB, FCC, CE, WEEE, RoHS, REACH
Accessories	Supplied	Quick Guide, CD ROM (user manual and drivers), power cord, power adaptor, 15-Pin D-Sub cable, Audio cable



Available in black or white




NeoV™ Optical Glass and durable metal casing for water, dust and scratch resistance



Front-panel keypad with Input Select, Screen Menu, Contrast and Brightness controls for quick adjustments



Wide range of I/O connectors for flexibility and expandability in endoscopic video installations

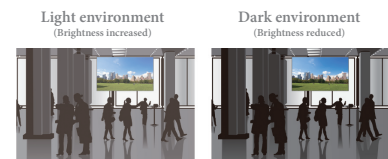

EcoSmart Sensor auto adjusts brightness for ultra low power consumption

