


8-channel digitally encoded video
+ 2 bi-directional data channels
+ bi-directional contact closure

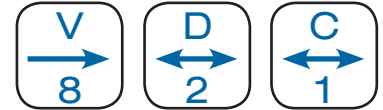

Description

The ComNet™ FVT/FVR812(M)(S)1 Series transmits eight (8) channels of video utilizing state of the art digital encoding and decoding for high-quality video transmission, along with two (2) channels of bi-directional data and one (1) bi-directional contact closure over one single mode or multimode optical fiber. This equipment is environmentally hardened and suitable for use in unconditioned roadside or out-of plant installations. The FVT/FVR812 is compatible with NTSC, PAL and SECAM video transmission protocols and supports bi-directional RS232, 422 and 485 (2 & 4 Wire) data. Plug-and-play design ensures ease of installation and no electrical or optical adjustments are required. Bi-Color LED indicators are provided to indicate the status of the system, video and data. Packaged in the exclusive ComNet ComFit housing, these units may be either wall or rack-mounted, or may be DIN-rail mounted by the addition of ComNet model DINBKT1 adaptor plate. No additional parts or power supplies are required.

Features

- Digitally-encoded video transmission: transmits 8 real-time color video signals and 2 bi-directional data signals on one optical fiber
- Supports RS232, RS422, and 2- or 4-wire RS485
- One bi-directional contact closure
- Compatible with all NTSC, PAL, or SECAM CCTV camera systems
- Tested and certified by an independent laboratory for full compliance with the environmental requirements (ambient operating temperature, mechanical shock, vibration, humidity with condensation, high-line/low-line voltage conditions and transient voltage protection) of NEMA TS-1/TS-2 and the Caltrans Specification for Traffic Signal Control Equipment.
- Voltage transient protection on all power and signal input/output lines provides unconditional protection from power surges and other voltage transient events.
- Robust design ensures extremely high reliability in unconditioned out-of-plant environments
- Bi-color (Red/Green) LED status indicators provide rapid indication of critical operating parameters
- Hot-swappable rack modules
- Interchangeable between stand-alone or rack mount use
 - ComFit
- Five year warranty

Applications

- High-Performance CCTV (Fixed Video)

specifications

VIDEO

Video Input: 1 volt pk-pk (75 ohms)
 Overload: >1.5V pk-pk
 # Input/Output Channels: 8
 Bandwidth (minimum): 10 Hz - 6.5 MHz per channel
 Differential Gain: <4%
 Differential Phase: <0.7°
 Tilt: <1%
 Signal-to-Noise Ratio (SNR): 57 dB Typical
 Max. RG-59 COAX Distance: 100m (300ft) Camera to Fiber Optic Module to maintain 6Mhz Bandwidth

DATA

Data Channels: 2
 Data Interface: RS232, RS422 and RS485 (2W/4W)
 Data Format: NRZ, NRZI, Manchester, Bi-Phase and Sensornet
 Data Rate: DC-250 Kbps (NRZ)
 Bit Error Rate: <1 in 10-9 @ Maximum Optical Loss Budget
 Operating Mode: Simplex or Full-Duplex

CONTACT

Contact Interface: Response Time 0.5 msec
 Input: Dry Contact Closure
 Output: SPST Relay, 0.5 A Contact Rating – normally open

WAVELENGTH

NUMBER OF FIBERS

LED INDICATORS

- 1 - Video Sync Presence for Each Video Channel
- Received Data - Transmitted Data
- Optical Carrier Detect

OPTICAL EMITTER CONNECTORS

Laser Diode

Optical: ST
 Power: Terminal Block
 Video: BNC (Gold Plated Center-Pin)
 Data: Terminal Block

ELECTRICAL & MECHANICAL

Power: 8-15 VDC @ 5W
 Surface Mount: From Rack
 Rack Mount: 3
 Number of Rack Slots: Automatic Resettable Solid-State Current Limiters
 Current Protection: Meets IPC Standard

Circuit Board: 6.1 x 5.3 x 3.3 in., (15.5 x 13.5 x 8.3 cm)
 Size (in./cm) (LxWxH): <2 lb./0.9 kg
 Shipping Weight:

ENVIRONMENTAL


MTBF: >100,000 hours
 Operating Temp: -40° C to +75° C
 Storage Temp: -40° C to +85° C
 Relative Humidity: 0% to 95% (non-condensing)*

* May be extended to condensation conditions by adding suffix '/C' to model number for conformal coating.



PART NUMBER	DESCRIPTION	FIBERS REQUIRED	FIBER	OPTICAL PWR BUDGET	MAX. DISTANCE†	# RACK SLOTS
FVT812M1	Video Transmitter/Data Transceiver (1310/1550 nm)	1	Multimode 62.5/125µm	16 dB	2 km (1.2 miles)	3
FVR812M1	Video Receiver/Data Transceiver (1550/1310 nm)					
FVT812S1	Video Transmitter/Data Transceiver (1310/1550 nm)	1	Single Mode 9/125µm	16 dB‡	48 km (30 miles)	3
FVR812S1	Video Receiver/Data Transceiver (1550/1310 nm)					
Accessories	9 Volt DC Plug-in Power Supply, 90-264 VAC, 50/60 Hz (Included)					
Options	Add '/C' for Conformally Coated Circuit Boards (Extra charge, consult factory) DIN-Rail Mounting Adaptor Plate Kit – With mounting hardware (Optional, order model DINBKT1)					

NOTE: This product requires a fiber installation with a minimum 30 dB connector return loss. The use of Super Polish Connectors is recommended.
 † Distance may be limited by optical dispersion. High bandwidth 50/125µm fiber is required to achieve maximum multimode distance. Contact ComNet tech support before using these units for distances greater than 2 km.
 Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J. In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

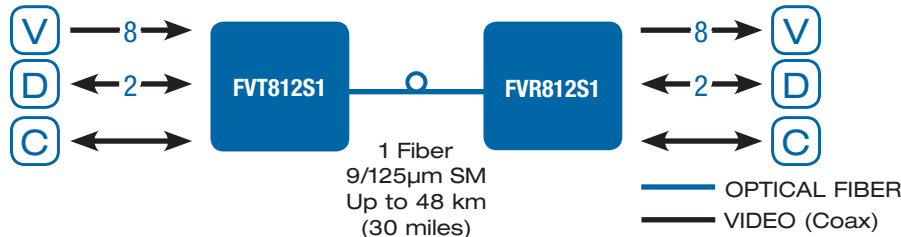

3 CORPORATE DRIVE | DANBURY, CT 06810 | USA
 T: 203.796.5300 | F: 203.796.5303 | TECH SUPPORT: 1.888.678.9427 | INFO@COMNET.NET
 8 TURNBERRY PARK ROAD | GILDERSOME | MORLEY | LEEDS, UK LS27 7LE
 T: +44 (0)113 307 6400 | F: +44 (0)113 253 7462 | INFO-EUROPE@COMNET.NET