

VA in the Box


DV-1104



- Specialized in DirectIP NVR
- Supports 4 channel IP Camera
- Supports People Counting
- Supports Heatmap
- Supports Queue Management

SPECIFICATIONS

DECODER	
Video Compression	H.264, H.265
Video Input	4ch IP
Supported Devices	DirectIP NVR
Max. Network Throughput	20Mbps
Network Connection	Gigabit Ethernet x 1
VA Support	People Counting
	Heatmap
	Queue Management (Max. 3 queues)
GENERAL	
Dimensions (W x H x D)	200mm x 44mm x 153mm (7.9" x 1.7" x 6.0")
Weight	0.74kg (1.6lb)
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)
PoE (Class)	Yes (IEEE 802.3af Class 3)
Power Source	12VDC, PoE
Power Consumption	6.6W
Approvals	FCC, CE, KC

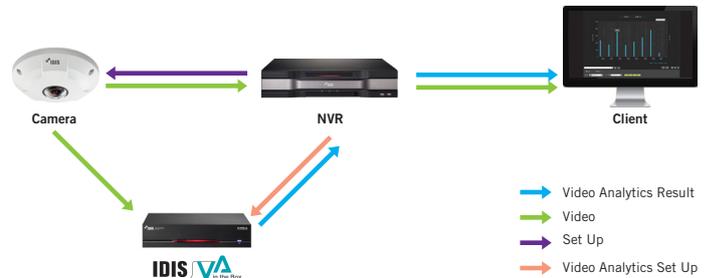

Analytic Reports Reports and graphs

Report with graphs and thumbnails by setting a time period. Periodical analysis for each feature is available through the VMS "VA report" tab. You can check hourly/daily/weekly/monthly data in detail by simply entering a date and time. The data from the People Counting, Queue Management, and Heat Map functions can be reviewed individually or collectively.

DirectIP 16 Channel Decoder

DD-1216

- Specialized in DirectIP NVR
- Supports IDIS IP Camera
- Supports HDMI, VGA, CVBS port
- Up to 4 channel Full HD display
- Up to 16 channel real-time display

SPECIFICATIONS

DECODER	
Video Compression	H.264, H.265
Video Input	16ch IP
Video Input Resolution	Up to 12MP
Supported Devices	DirectIP NVR, IDIS IP Camera
Video Outputs	1 HDMI, 1 VGA, 1 CVBS
Display Resolution	HDMI, VGA : 3840 x 2160, 2560 x 1440, 1920 x 1200, 1920 x 1080, 1680 x 1050, 1600 x 1200, 420 x 480, 720 x 576 CVBS : 640 x 480
Display Speed	Up to 480ips
Max. Network Throughput	50Mbps
Network Connection	Gigabit Ethernet x 1
GENERAL	
Dimensions (W x H x D)	200mm x 44mm x 153mm (7.9" x 1.7" x 6.0")
Weight	0.78kg (1.72lb)
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)
PoE (Class)	Yes (IEEE 802.3af Class 0)
Power Input	12VDC, PoE
Power Consumption	12.7W
Approvals	FCC, CE, KC



DIMENSIONS

